




PATENT #10,794,548

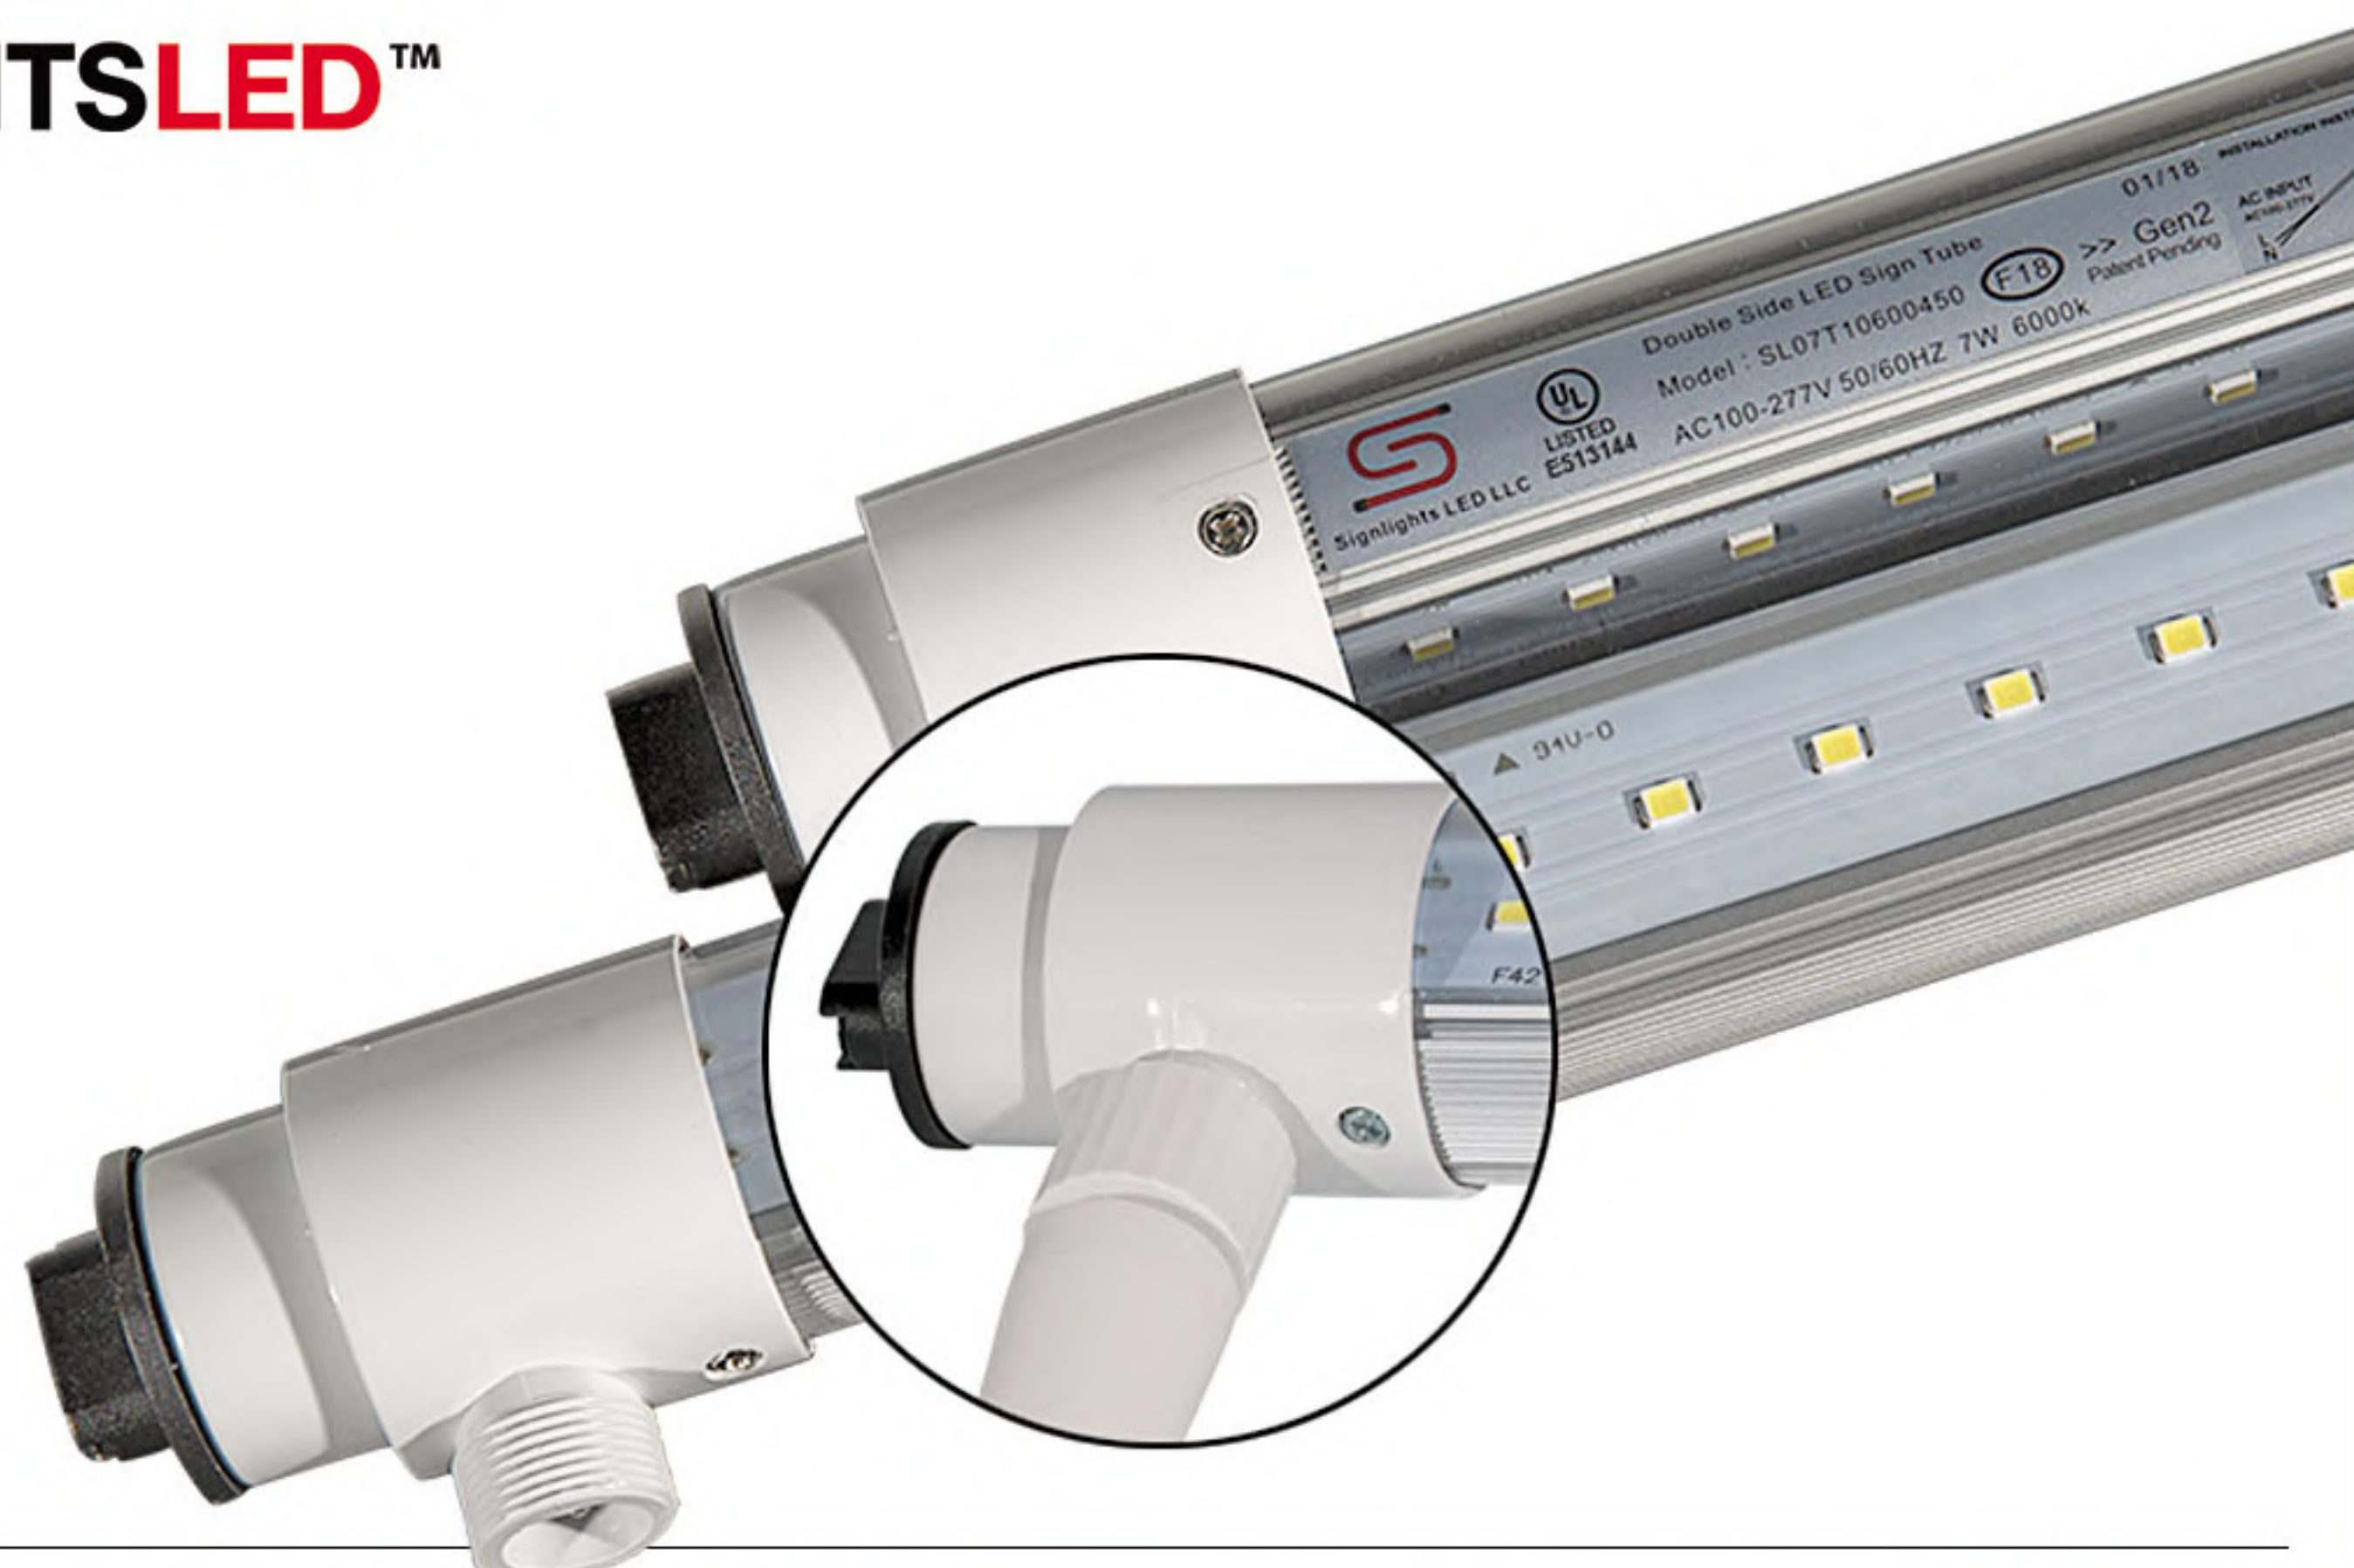

DOUBLE SIDE LED SIGN TUBE WITH LENS GENERATION 3

MADE FOR MENU BOARDS

KEY FEATURES

Innovative LED Technology in Sign Retrofitting.

Patented Technology

Designed to retrofit any Sign(any size) in less than 30 minutes.

Retrofit kit-Super bright, efficient LED light, light output over 700lm/ft.

Lower energy consumption and Maintenance free.

Internal Power Supply-No need for any External LED driver or ballast.

Heat Dissipation-Super heat dissipation structure, lower luminous decay, longer lifespan.

Two sides illumination-Circular Tube with two sided LEDs, creates a wider illumination and it's an ideal solution for Pylon & Monument Signs.

Available Sizes:

F18, F24, F30, F36, F42, F48, F60, F64, F72, F84, F96, F108, F117, F120


www.signlightled.com
info@signlightled.com

111 Preamble Ct., Anderson, SC 29621
864-372-2378


DOUBLE SIDE LED SIGN TUBE WITH LENS - GENERATION 3



SPECIFICATIONS	
Input Voltage	AC100-277V
Operating Frequency	50/60Hz
PF	>0.9
CCT	3500/4000/5000/6000K
CRI	80Ra
Power Efficiency	>90%
Rated Life	50,000Hrs
Warranty	5 Years

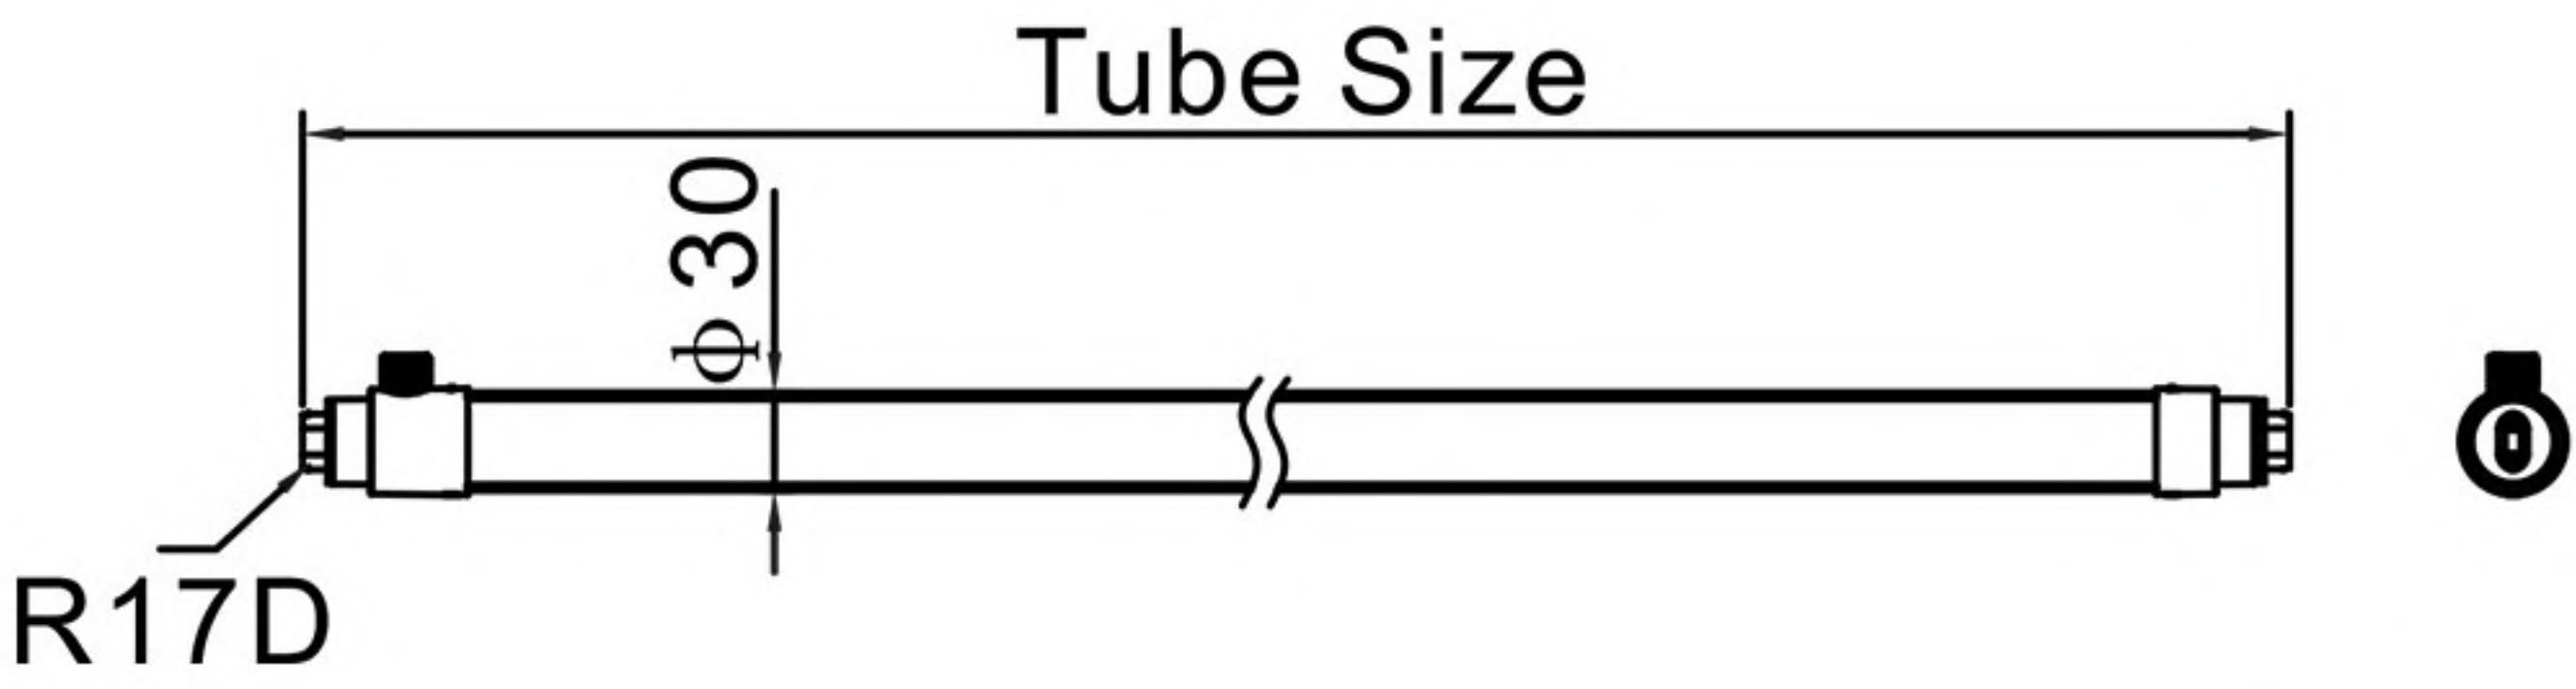


Sizes:
F18, F24, F30, F36, F42, F48,
F60, F64, F72, F84, F96

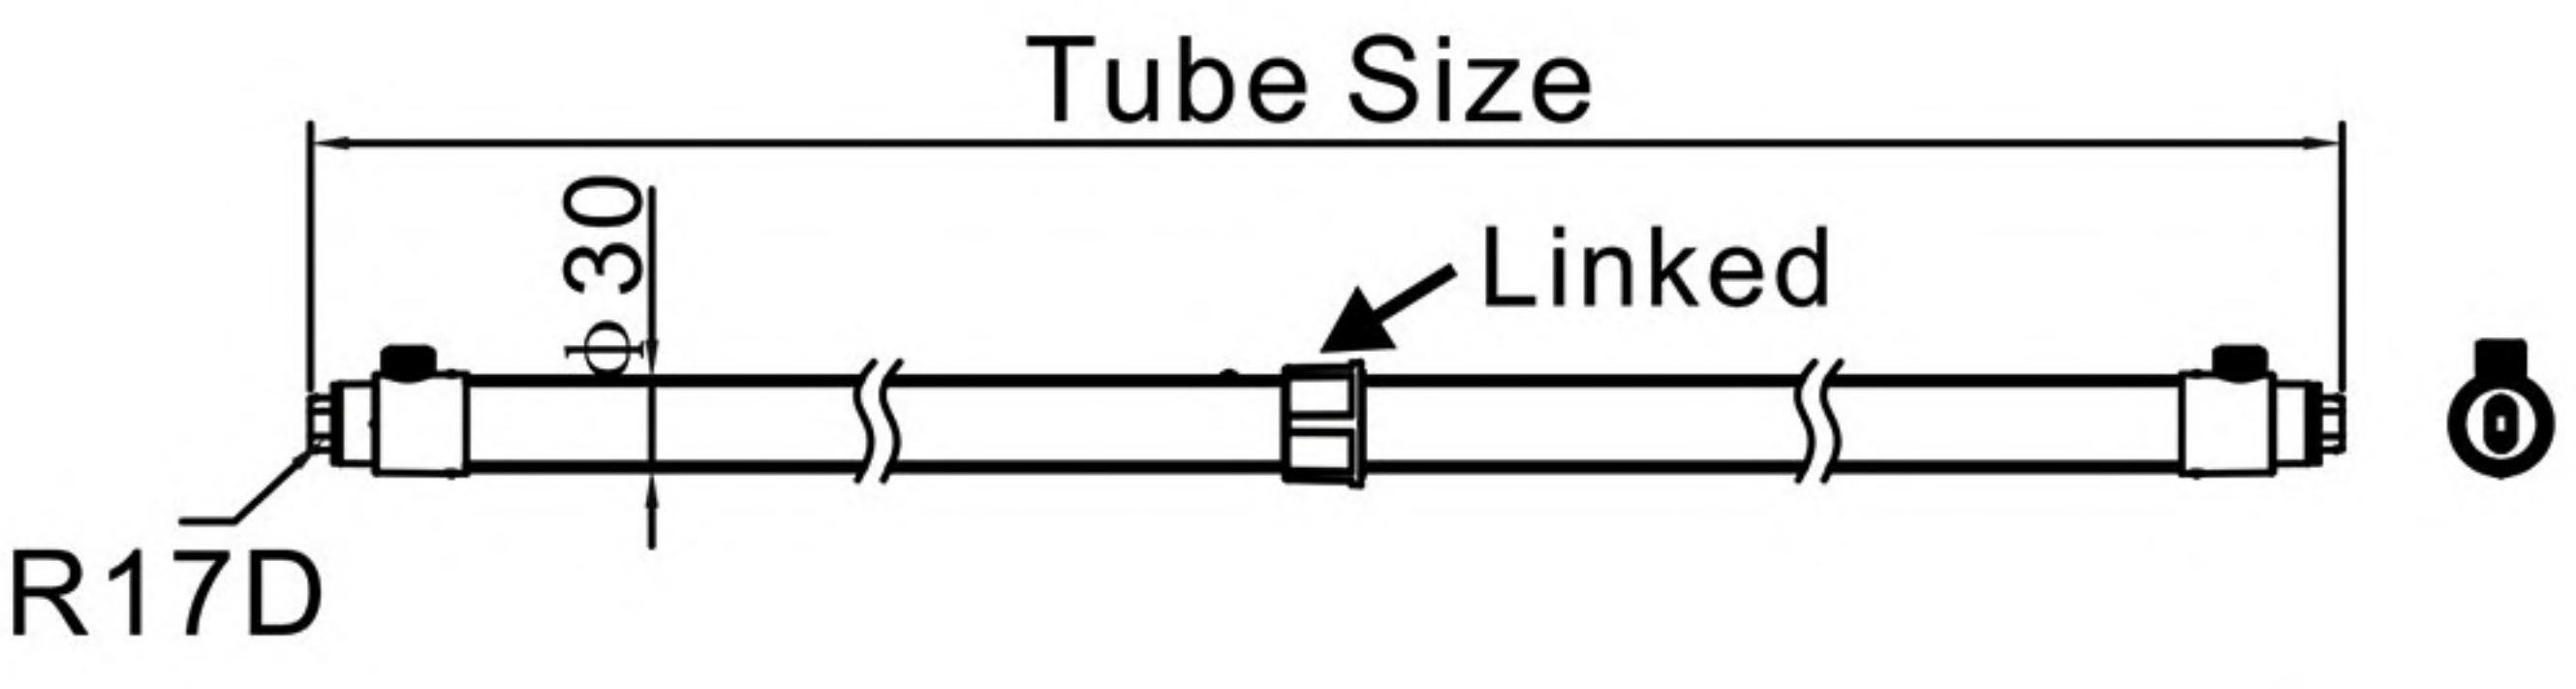

Sizes:
F108, F117, F120 (2 Pcs Per Lamp)
for Easy Shipping and Handling.

"T" CONNECTOR DIAGRAM

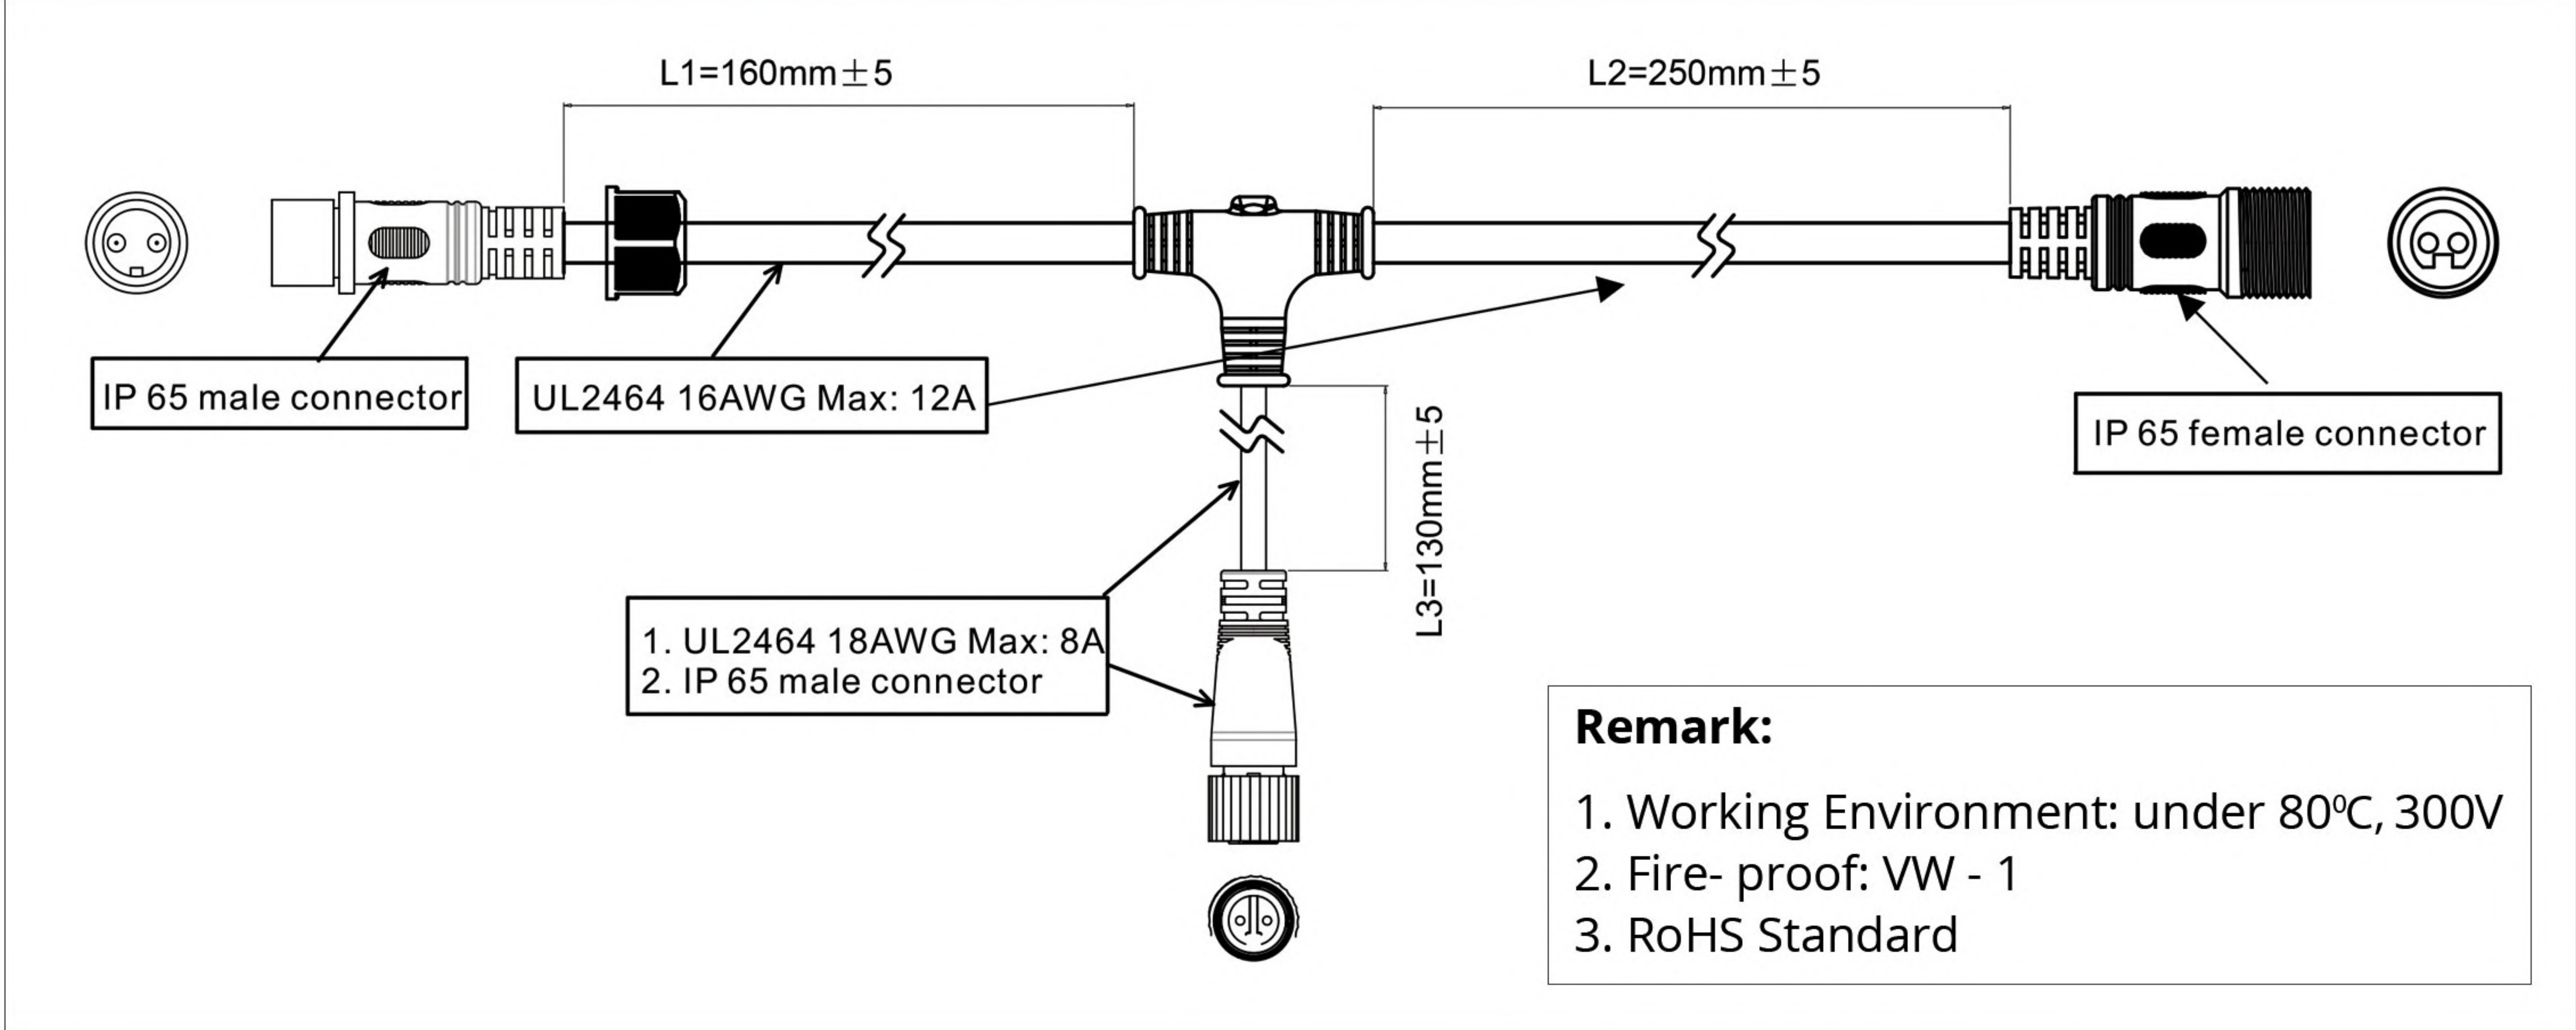

DOUBLE SIDE LED SIGN TUBE WITH LENS - GENERATION 3


MODEL NAME	TUBE SIZE	INPUT VOLTAGE	WATTAGE	LUMENS	COVER
3SL07T10XX0450	F18	AC100-277V	7W	910lm	Clear
3SL13T10XX0600	F24	AC100-277V	13W	1560lm	Clear
3SL13T10XX0750	F30	AC100-277V	13W	1690lm	Clear
3SL16T10XX0900	F36	AC100-277V	16W	2080lm	Clear
3SL21T10XX1050	F42	AC100-277V	21W	2700lm	Clear
3SL21T10XX1200	F48	AC100-277V	21W	2730lm	Clear
3SL28T10XX1500	F60	AC100-277V	28W	3640lm	Clear
3SL28T10XX1600	F64	AC100-277V	38W	3640lm	Clear
3SL38T10XX1800	F72	AC100-277V	38W	4750lm	Clear
3SL38T10XX2100	F84	AC100-277V	38W	4750lm	Clear
3SL51T10XX2475	F96	AC100-277V	51W	6630lm	Clear
3SL51T10XX2700	F108	AC100-277V	51W	6630lm	Clear
3SL60T10XX2925	F117	AC100-277V	60W	8450lm	Clear
3SL60T10XX3000	F120	AC100-277V	60W	8450lm	Clear

* "XX" in the Model Name represents CCT (3500K, 4000K, 5000K,6000K)(In Stock 6000K)


***FIXTURE SIZES ARE PERFECTLY MATCHED WITH EXISTING TUBES ,FOR HASSLEFREE INSTALLATION.**

INSTALLATION INSTRUCTION


1. Cut off the Power. Remove the diffuser (if applicable) and fluorescent lamp. Cut off all the wires going to the tombstones as new tubes are not getting any power from Ends.

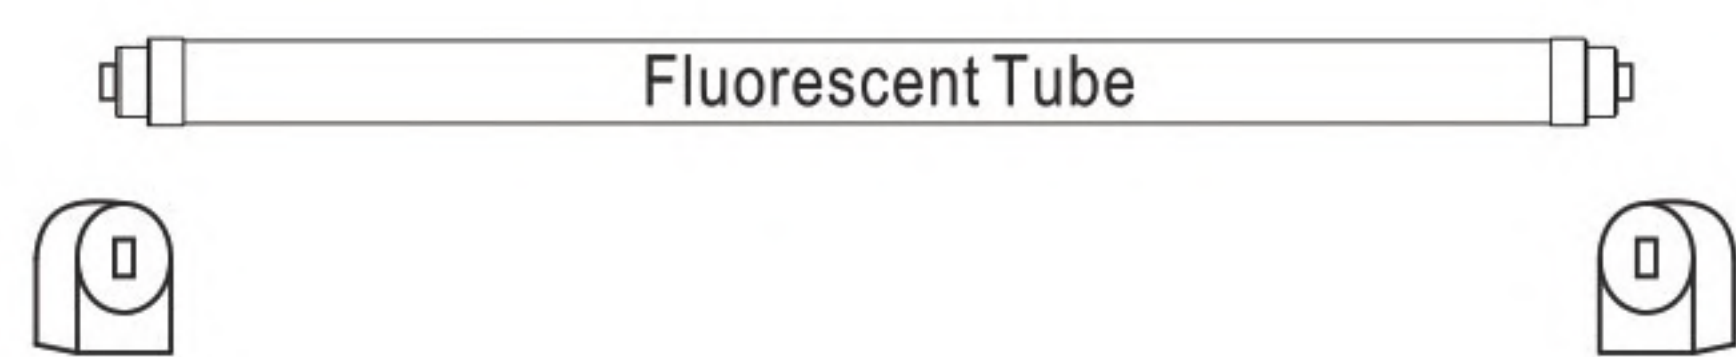

2. Connect the Sign LED tubes(male pin) and T connector wires (female) together as shown below. Customer must choose suitable wires(follow vendor's suggestion) to fit different qty of tubes' connecting.

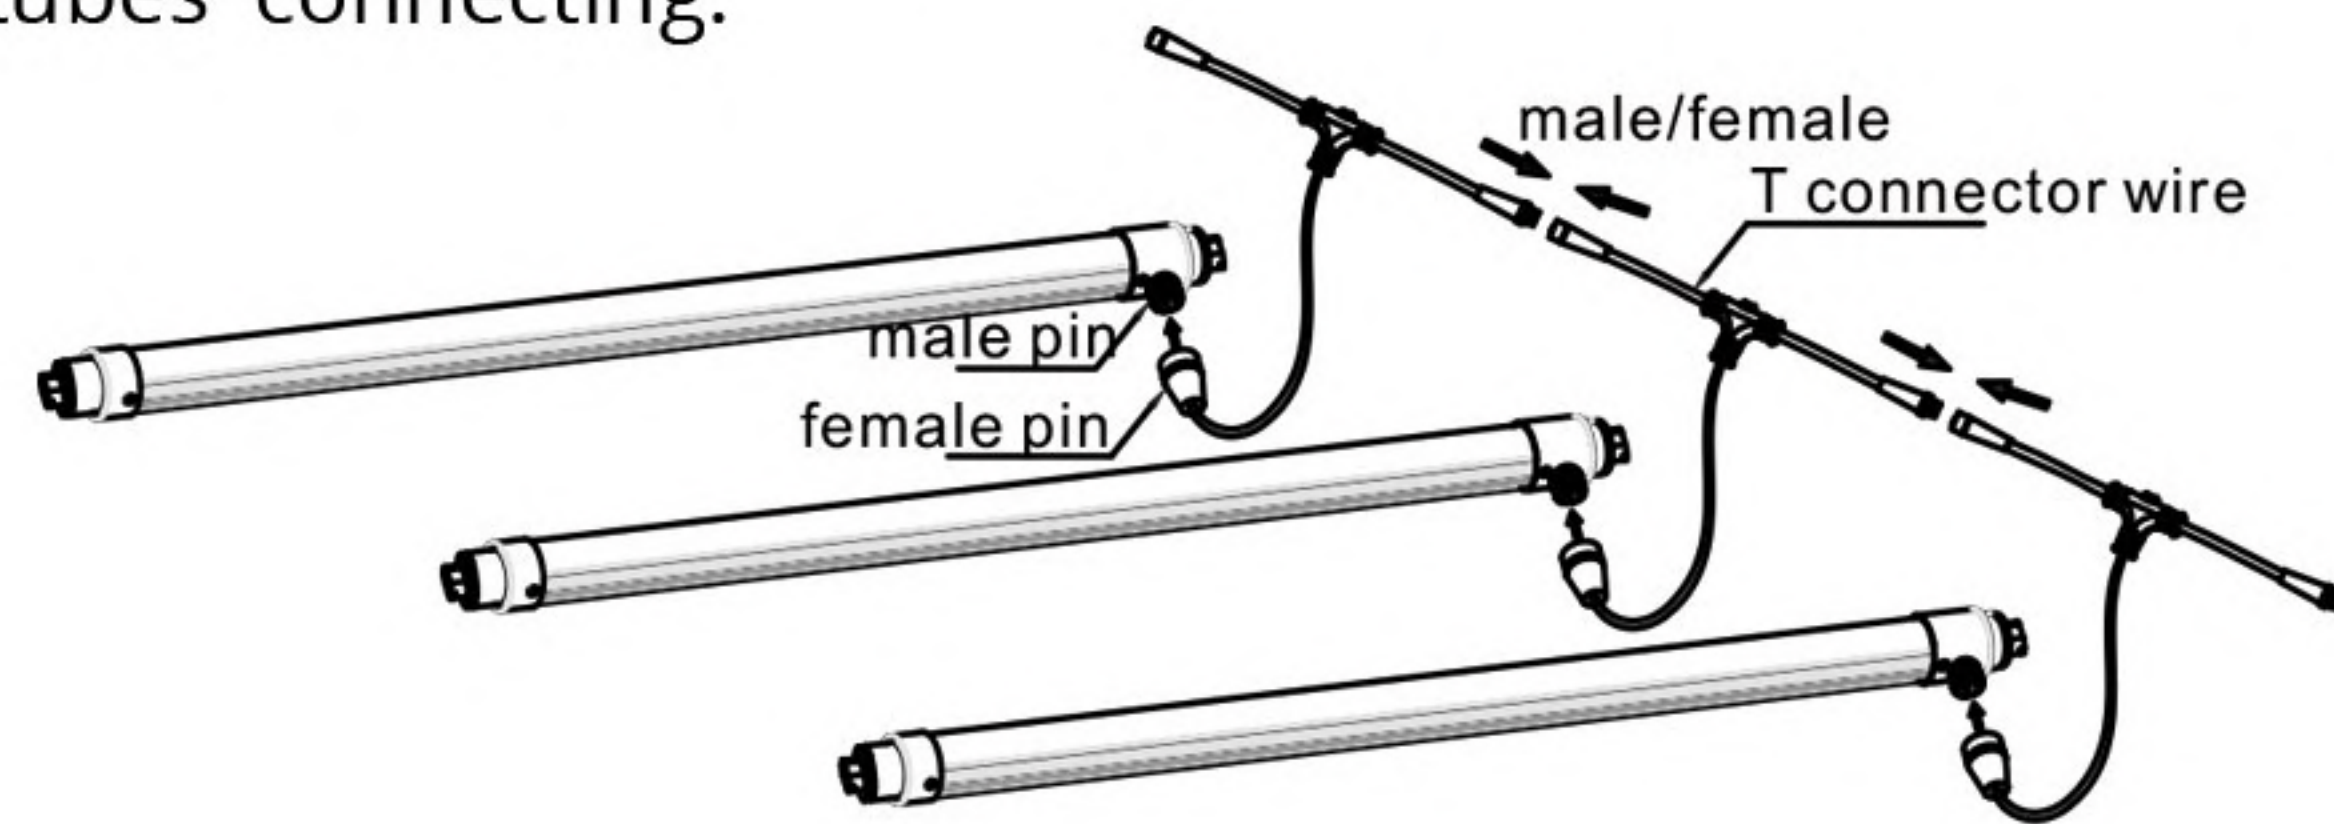

3. Install Sign LED Tube in place(bracket) and connect the Input AC wire as shown below.

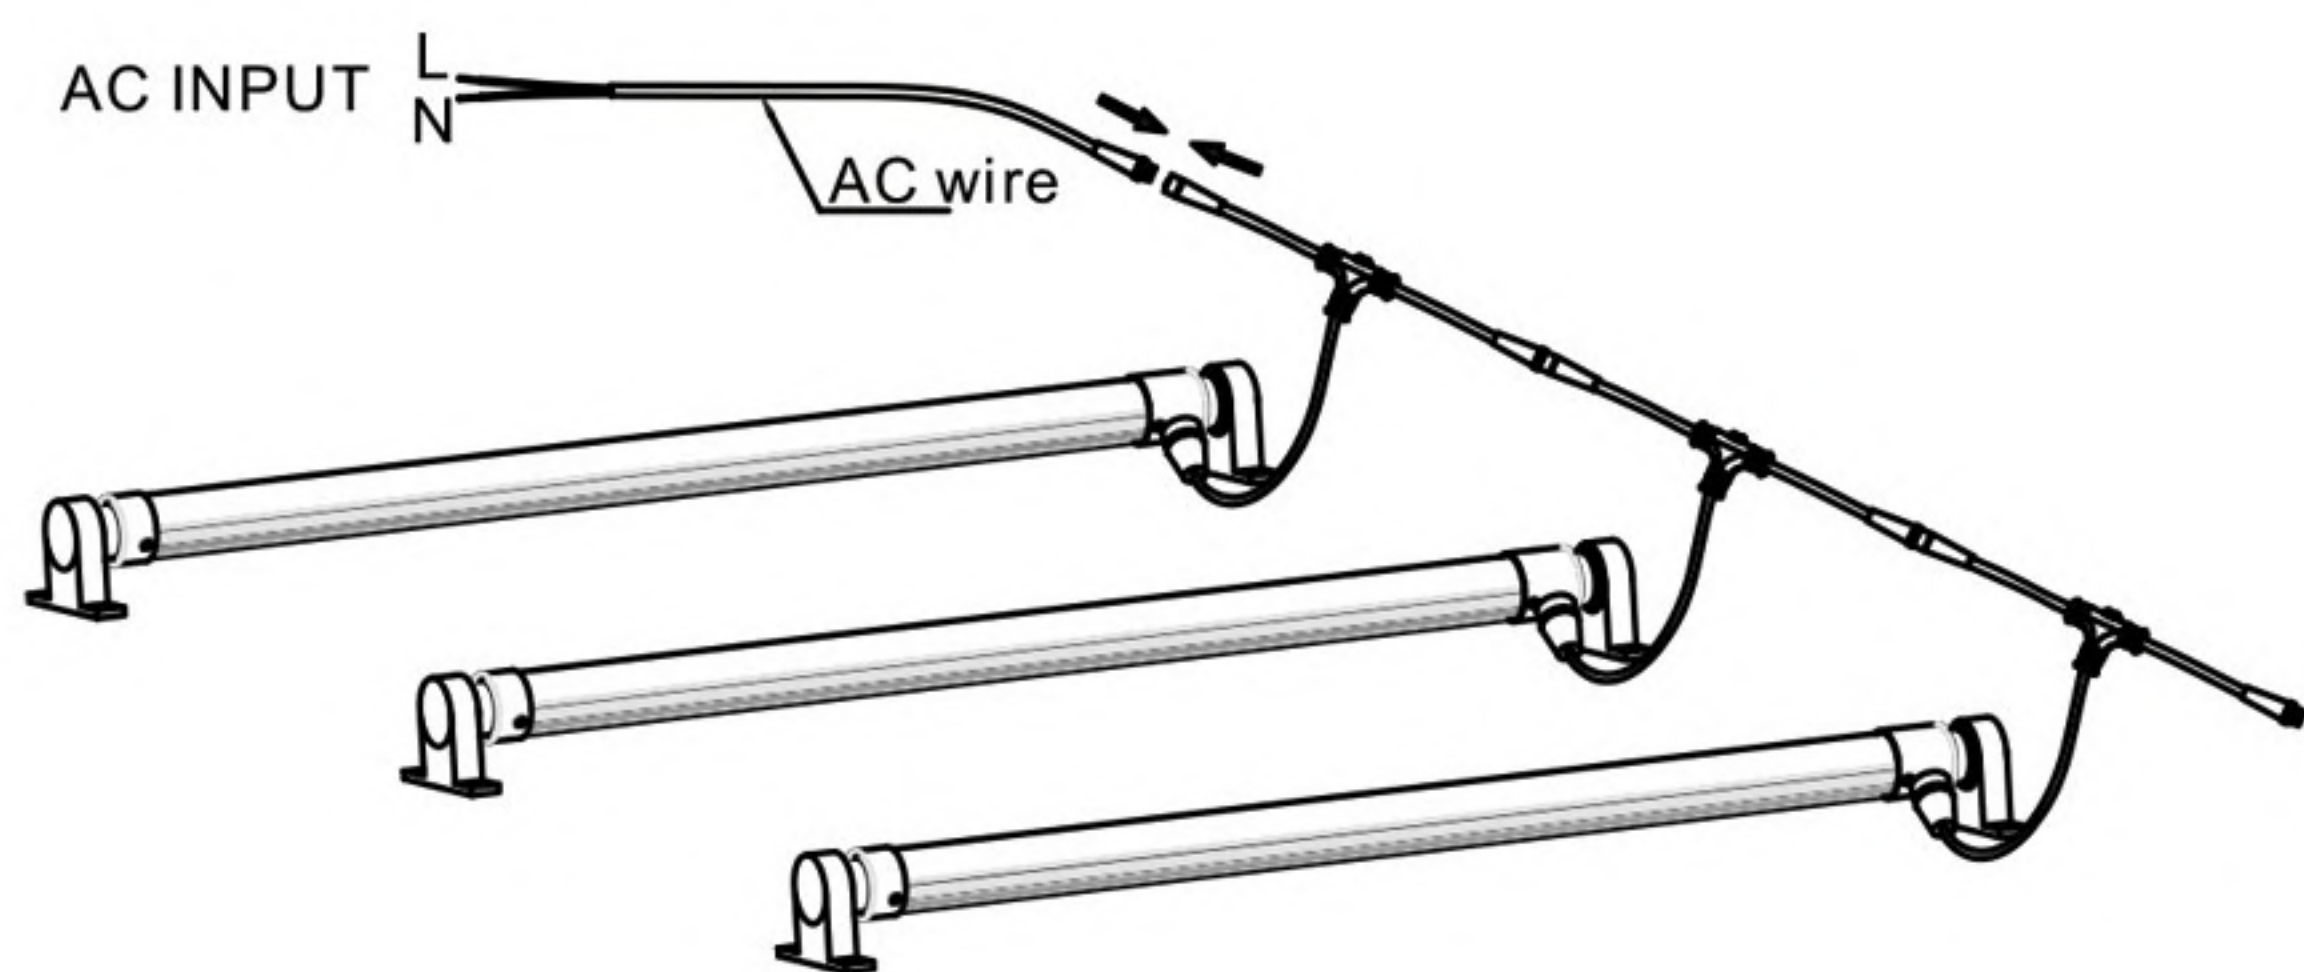

4. FIXTURES ARE NOT GETTING ANY POWER FROM THE END.
5. Can be connected 15pcs in series.

Warning: Please make sure power off before installation