



Article No	:	
Version	:	09.23
Prepared By	:	
Checked By	:	

EMERGENCY LIGHT EXIT SIGN



ORDERING INFORMATION

Product Code	Operating Voltage	Discharge Time	Color Of The Sign
CR-7037R	120/277V	90 Minutes	Red
CR-7037G	120/277V	90 Minutes	Green

FEATURES

- LED Technology
- High Visibility
- Multiple Mounting Options
- Battery Backup for power cut situations
- Photoluminescent Signs that glow in Dark
- Follow Compliance and Regulations- UL Listed

SPECIFICATIONS

Operating Temperature	-10°C - +45°C
Product Wattage	1.2W
Input Voltage Range	120-277 VAC
Input Frequency	60Hz
Power Factor	1
Battery	1.2V NiCad - Maintenance Free
Charging Time	24 Hours
Discharge Time	90 Minutes
Mounting	Wall, Side & Ceiling
Finish	White
Frame Material	ABS
Ingress Protection	IP20
Impact Protection	03

An exit light is a crucial safety fixture found in buildings and facilities. It serves as a reliable source of illumination during emergencies or power failures, ensuring the safety of occupants. These lights are strategically placed to clearly mark exit routes and provide visible directional guidance, helping people evacuate promptly and safely in case of fires, natural disasters, or other critical situations. Exit lights play a vital role in maintaining order and minimizing panic during stressful situations, contributing to overall building safety.



Warranty



Rated Life




+1 864 401 8156

sales@krutled.com

111 Preamble Ct, Anderson, SC- 29621, United States.

All rights reserved. Krut LED reserves the right to make changes to specifications and/or discontinue any product at anytime without the notice. Information presented in this document is reliable and accurate, It does not represent any quotation or contact. No liability will be accepted by the contributor by the publisher for any consequences for its use. Reproduction in whole or part is prohibited without prior consent of the copyright owner.

D I M E N S I O N

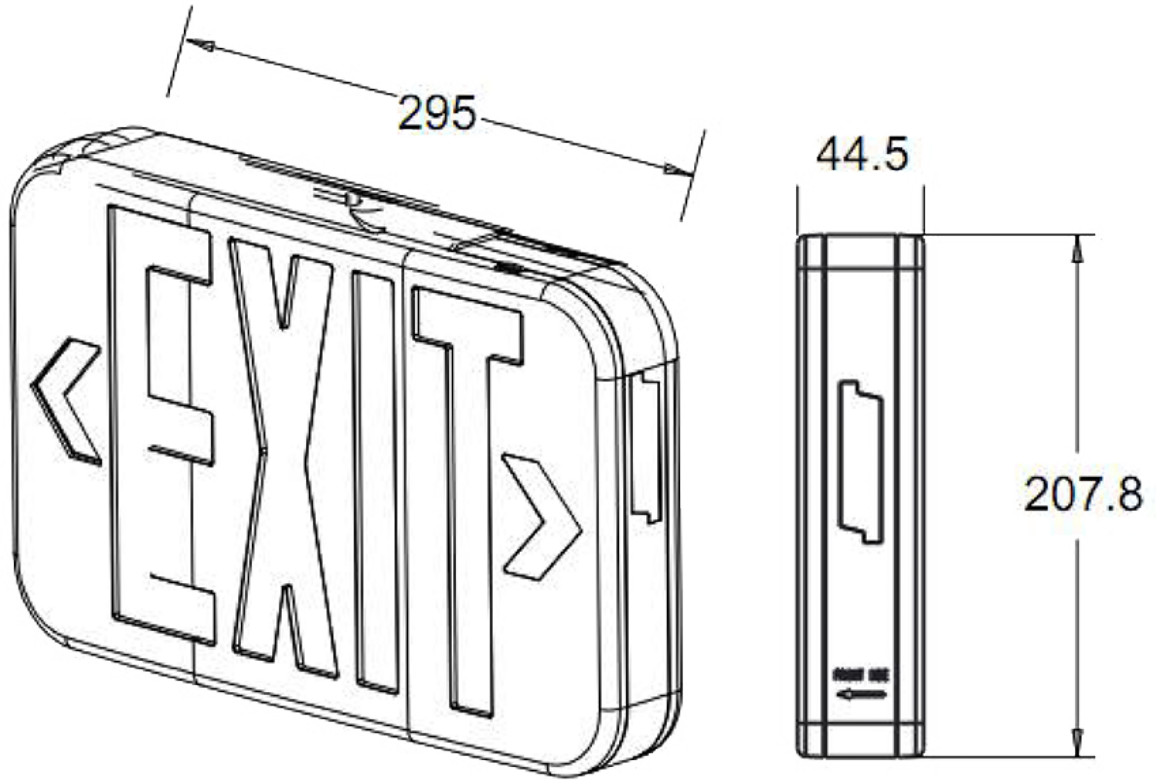

S H I P P I N G

Product Dimension (in)	Case Lot	Master Carton Dim. (in)	40' HQ Container Qty	Pallet Qty
11.61 x 7.25 x 1.75	10	22.91 x 10.39 x 12.63	1480 Nos	150 Nos


MOUNTING INSTRUCTIONS

Wall mounting


1. Remove mounting plate from fixture.



2. Knockout in back of mounting plate and push wires through the hole.



3. Securely attach mounting plate to J- box (not provided).

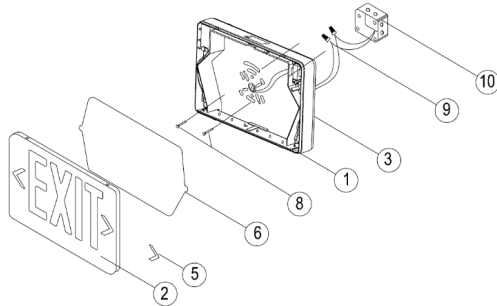


4. ELECTRICAL CONNECTIONS


Make the proper supply wire connections.

If using 120VAC, connect the black and White wires to the building utility.

If using 277VAC, connect the Orange and White wires to the building utility.

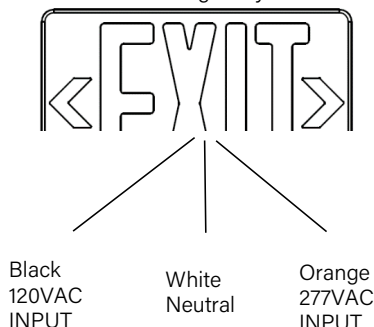

5. Connect the battery to connector on the PCBA.

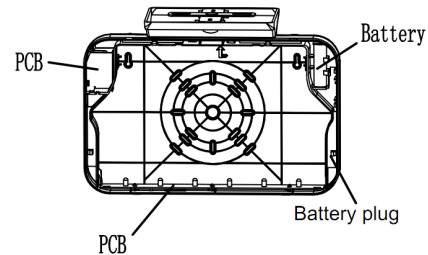


6. Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.

7. Restore power and press test button. Battery powered LED will come on, AC light will turn off.

Side or Ceiling Mounting

1. Open top cover and knockout on the top of fixture.
2. Secure the mounting plate to tube with nut.
3. Push the wires through "A" for ceiling mounting or "B" for side mounting.

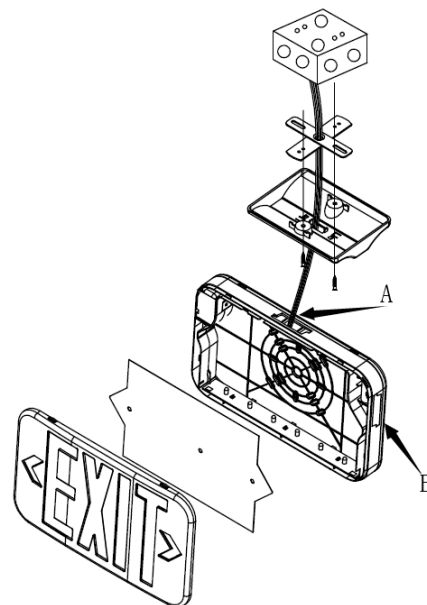

4. Reference step 4-8 in wall mounting above for side or ceiling mounting.