




Commercial &
Industrial Lighting

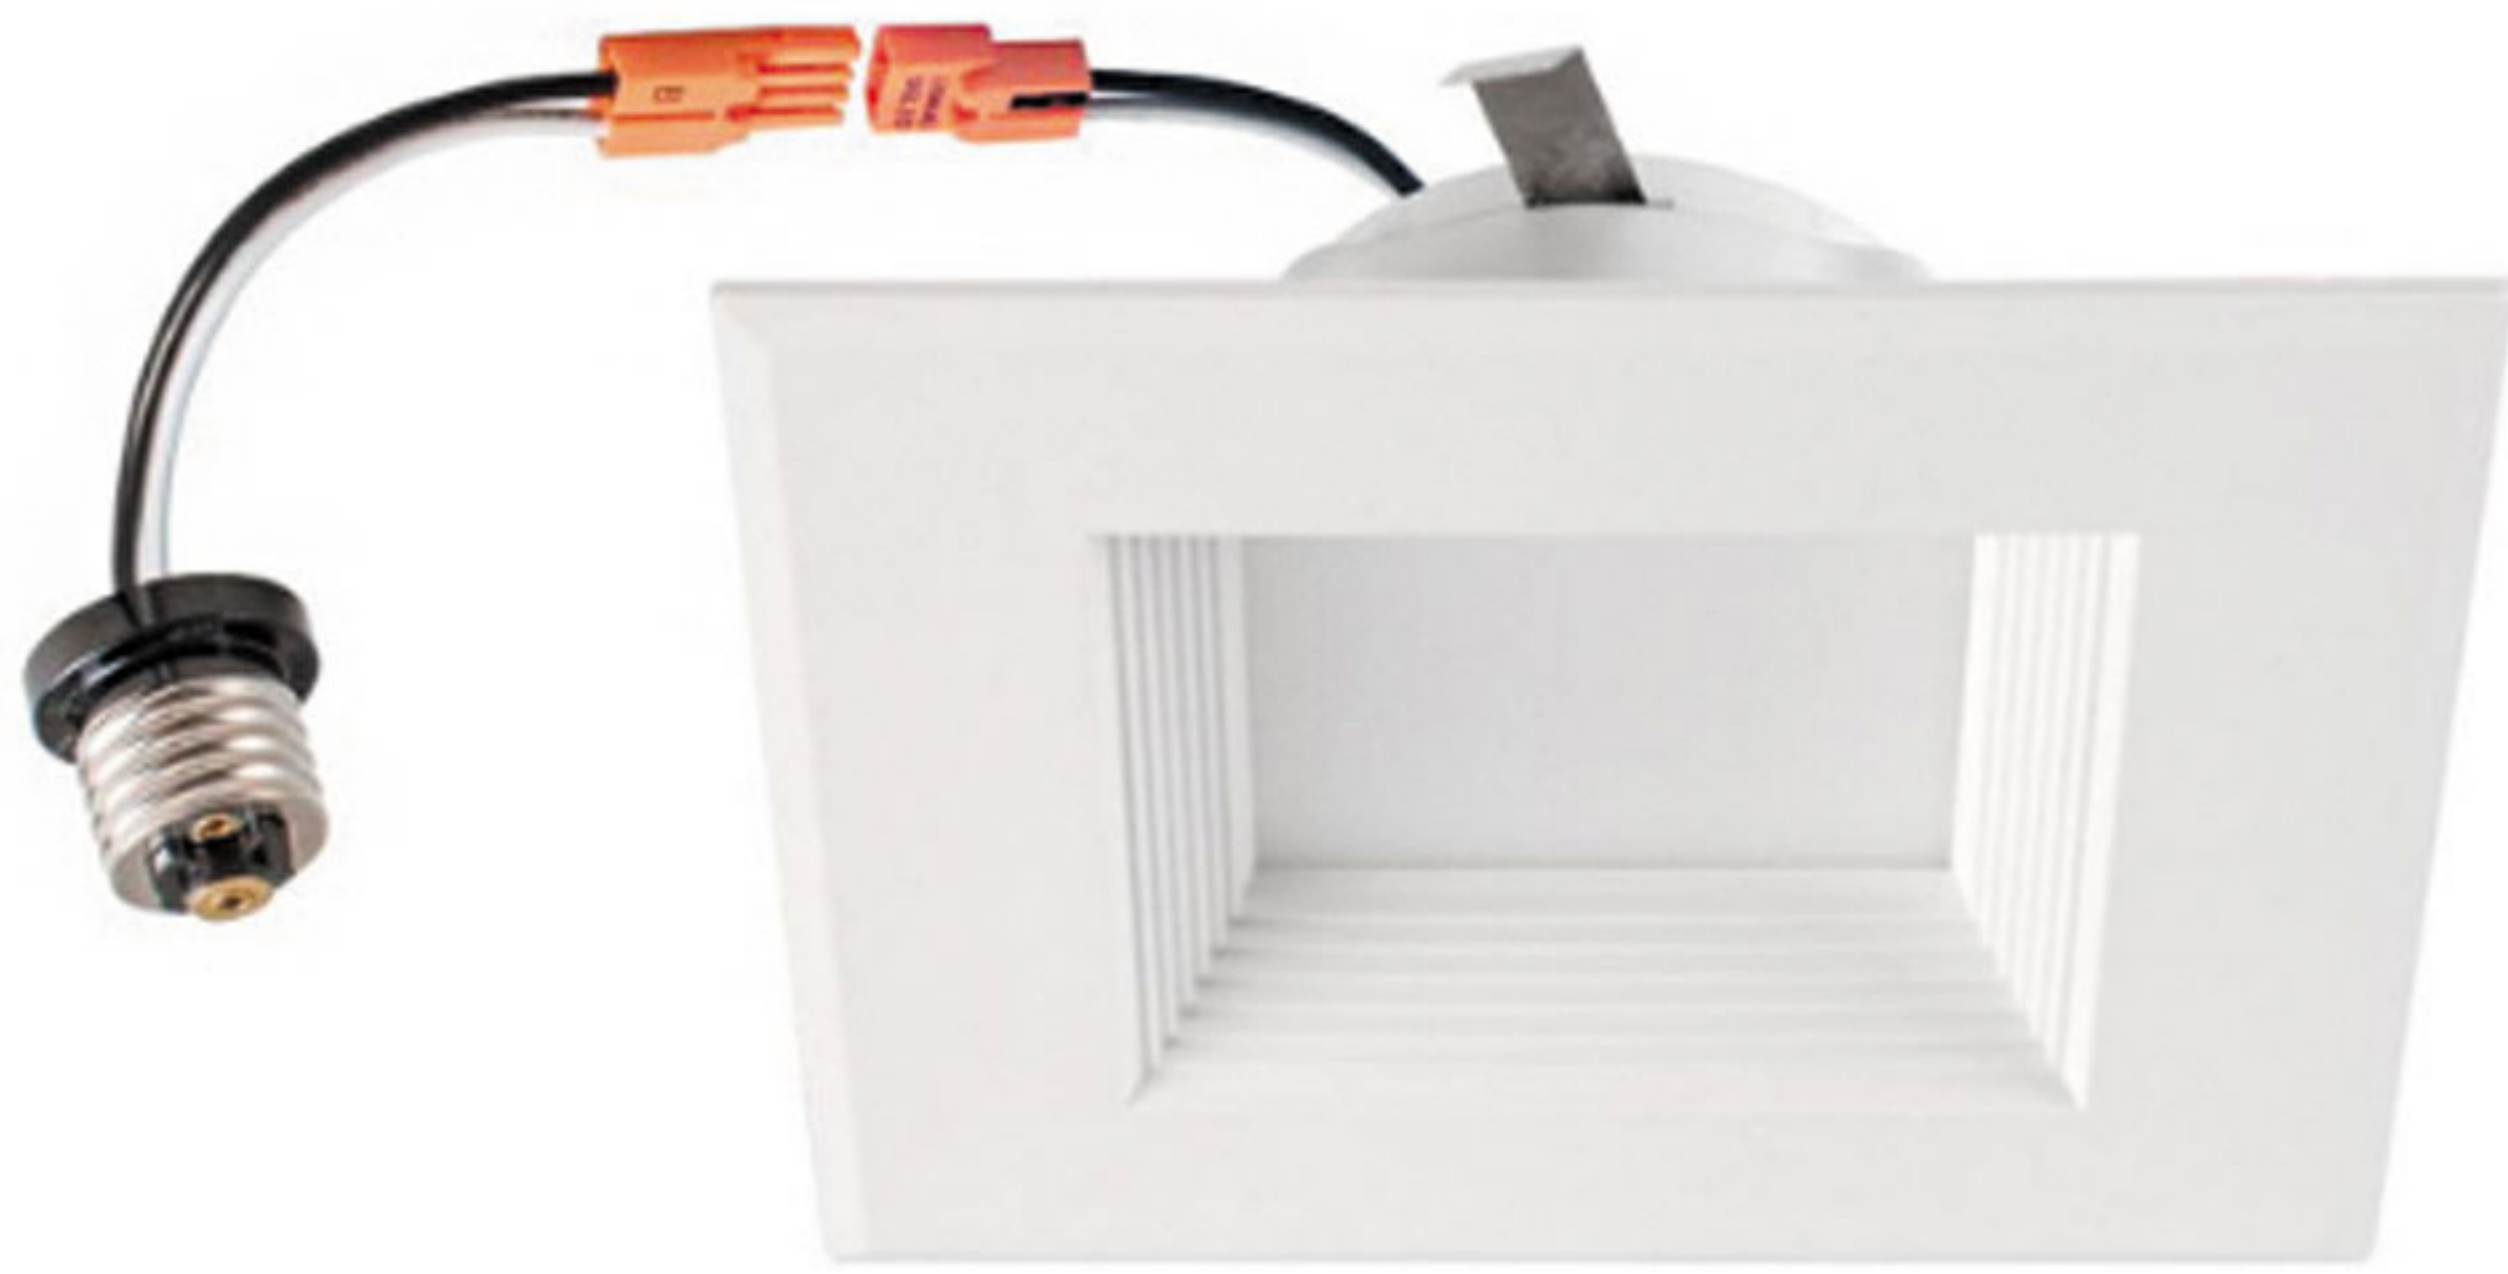

LED DOWN LIGHTS

4" - 6"



LED DOWNLIGHTS - SQUARE

DESCRIPTION:

Krut LED™ Downlights are the correct light for your home or business. Downlights is easy to handle and install. Just use the E26 adapter to screw in your lights and push the fixture into the housing. It's Green and eco-friendly without mercury.

APPLICATIONS:

Home, Office and Shopping Malls



SPECIFICATION FEATURES



LISTING:

UL / Energy Star Approved

WARRANTY:

5 Yrs Warranty

OTHER DETAILS

To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Risk of fire or electric shock. The electrical rating of these products are 100-277 Vac, the installer must determine whether they have 100-277 V at the luminaire before installation.

Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.


Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.

Min. 90°C Supply Conductors


Warranty Period assumes that the Products are operated for less than 8 hours per day.

PRODUCT DIMENSIONS

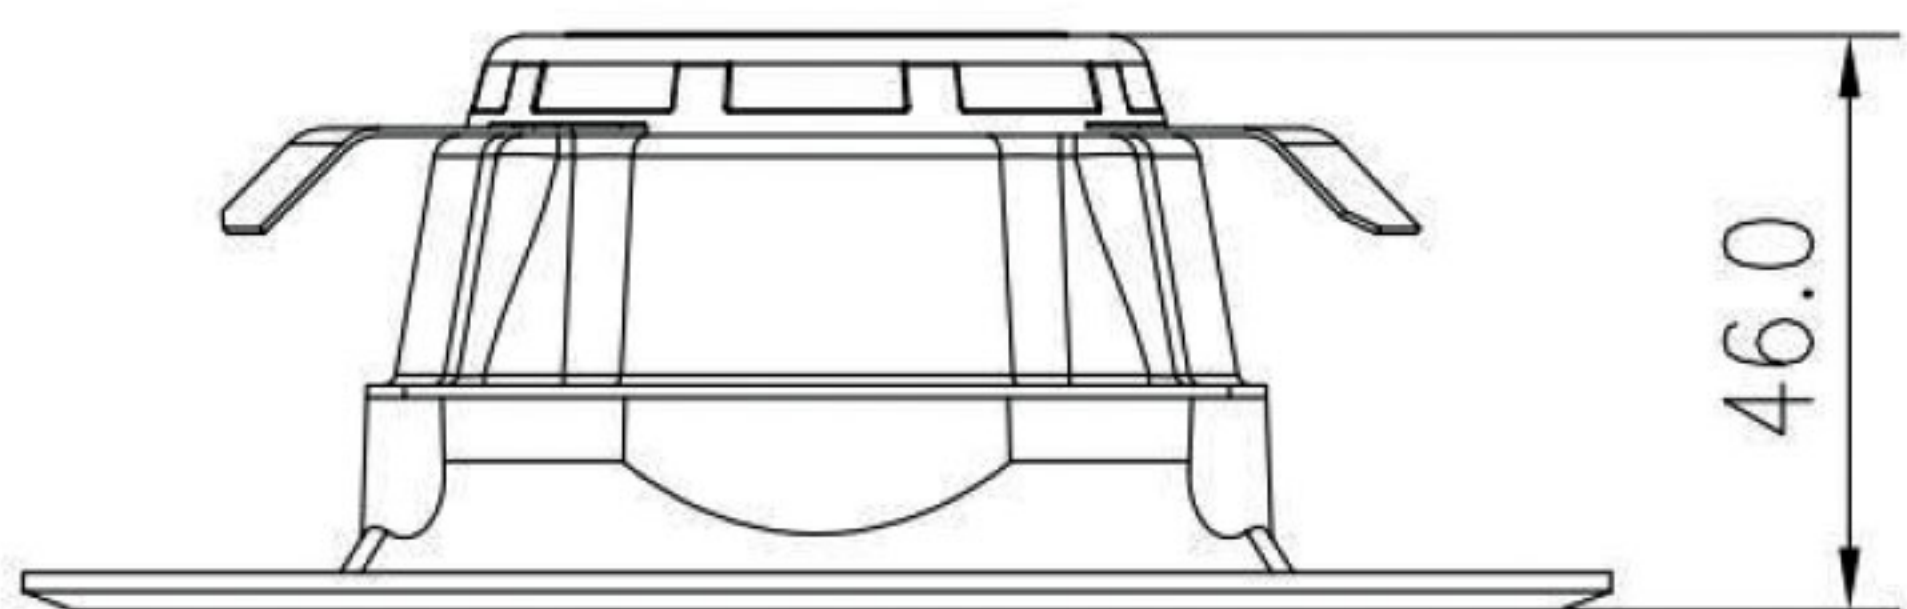

127.0

Size : Φ 127x46mm (5 x 1.81")

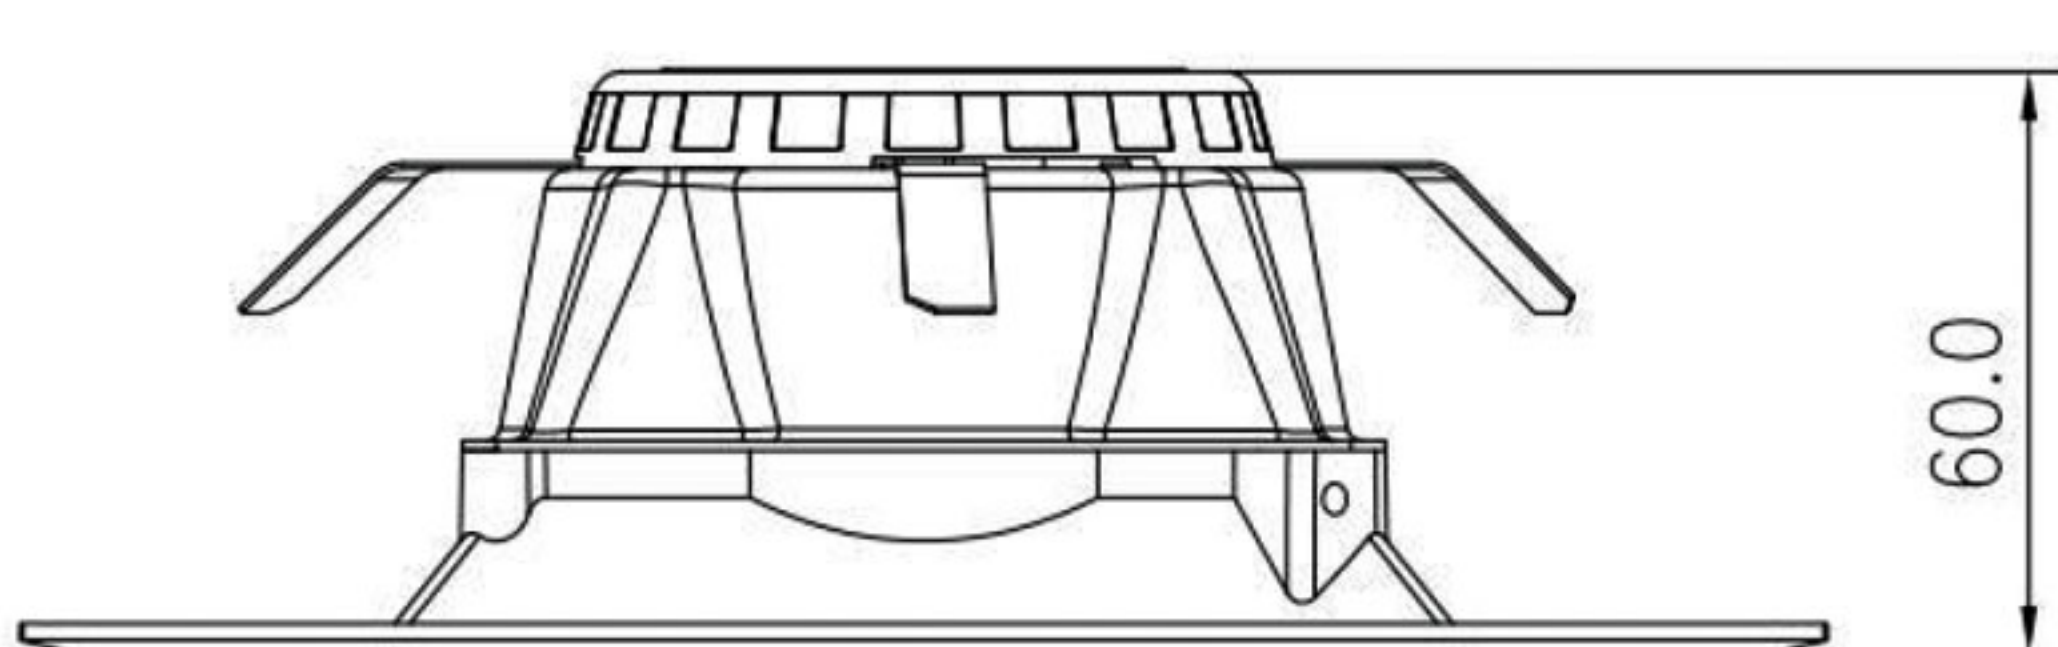

186.0

Size : Φ 186 x 60mm(7.32 x 2.36")

LED DOWNLIGHTS - SQUARE



LIGHTING PARAMETERS


Product Code	D724-XXXX	D726-XXXX
Wattage	9W	12W
Color Temperature	2700-5000K	2700-5000K
CRI	>90	>90
Lumen	600 LM	1000 LM
Application	Indoor	Indoor
Dimension	127 x 46 mm	186 x 60 mm
Life Span	50,000 Hrs	50,000 Hrs
Input Voltage	120V AC	120V AC
Light Type	LED Down Lights	LED Down Lights

PRODUCT FEATURES

- Save up to 80% in energy costs
 - High lumen output
 - Mercury-free
 - Instant-on light
- CCT: 2700-5000K
 - 5 years manufacturer warranty
 - 50,000 hours at 70% lumen maintenance rated life
 - Life time: 50,000 hours






PRODUCT PACKAGING

SIZE	CARTON SIZE	PCS/CTN	N.W.	G.W.
4"	40x28x14cm	12	4kgs/8.82 lb	5kgs/11.02 lb
4"	47x38x20.5cm	12	6kgs/13.23 lb	7kgs/15.43 lb

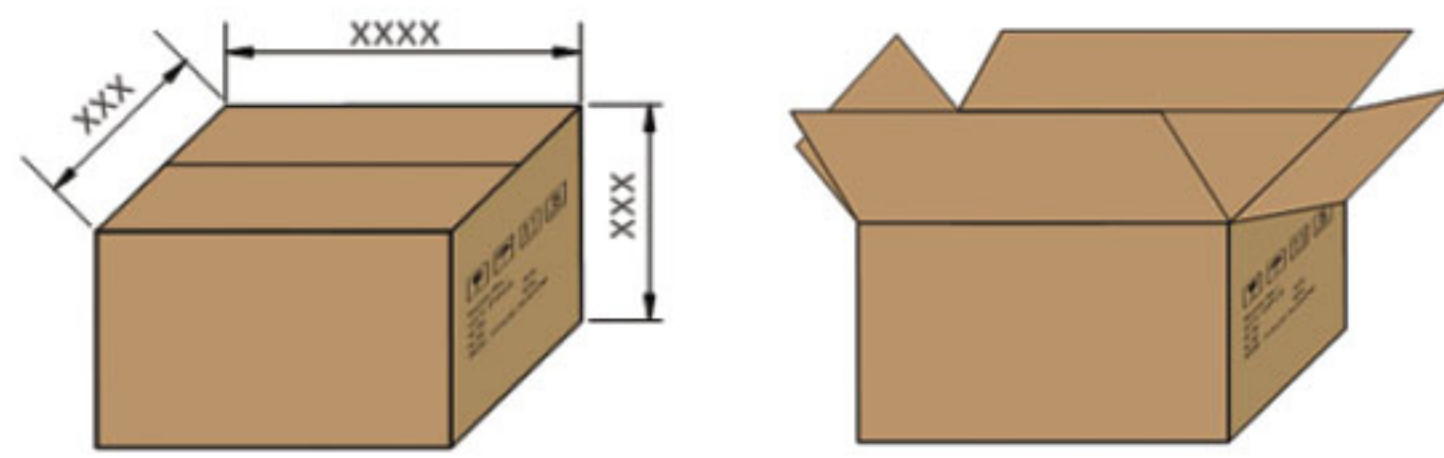

INSTALLATION INSTRUCTIONS

WARNING - RISK OF ELECTRIC SHOCK. DISCONNECT MAIN POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING THE FIXTURE.

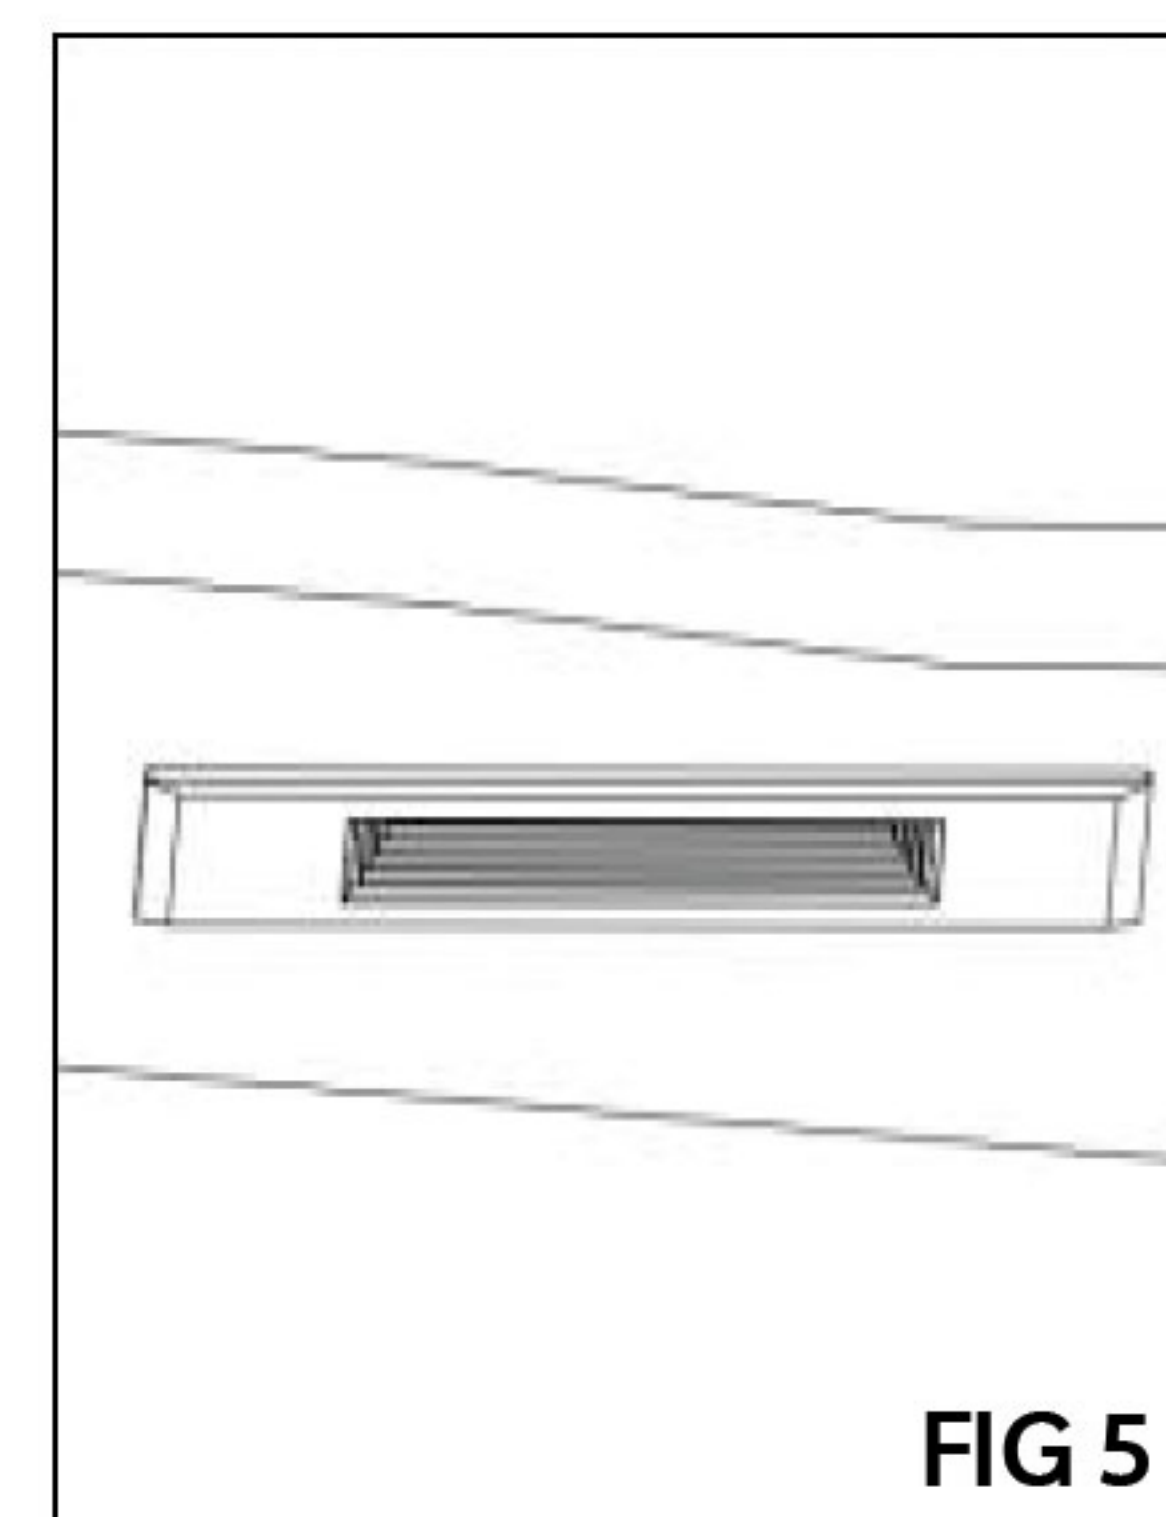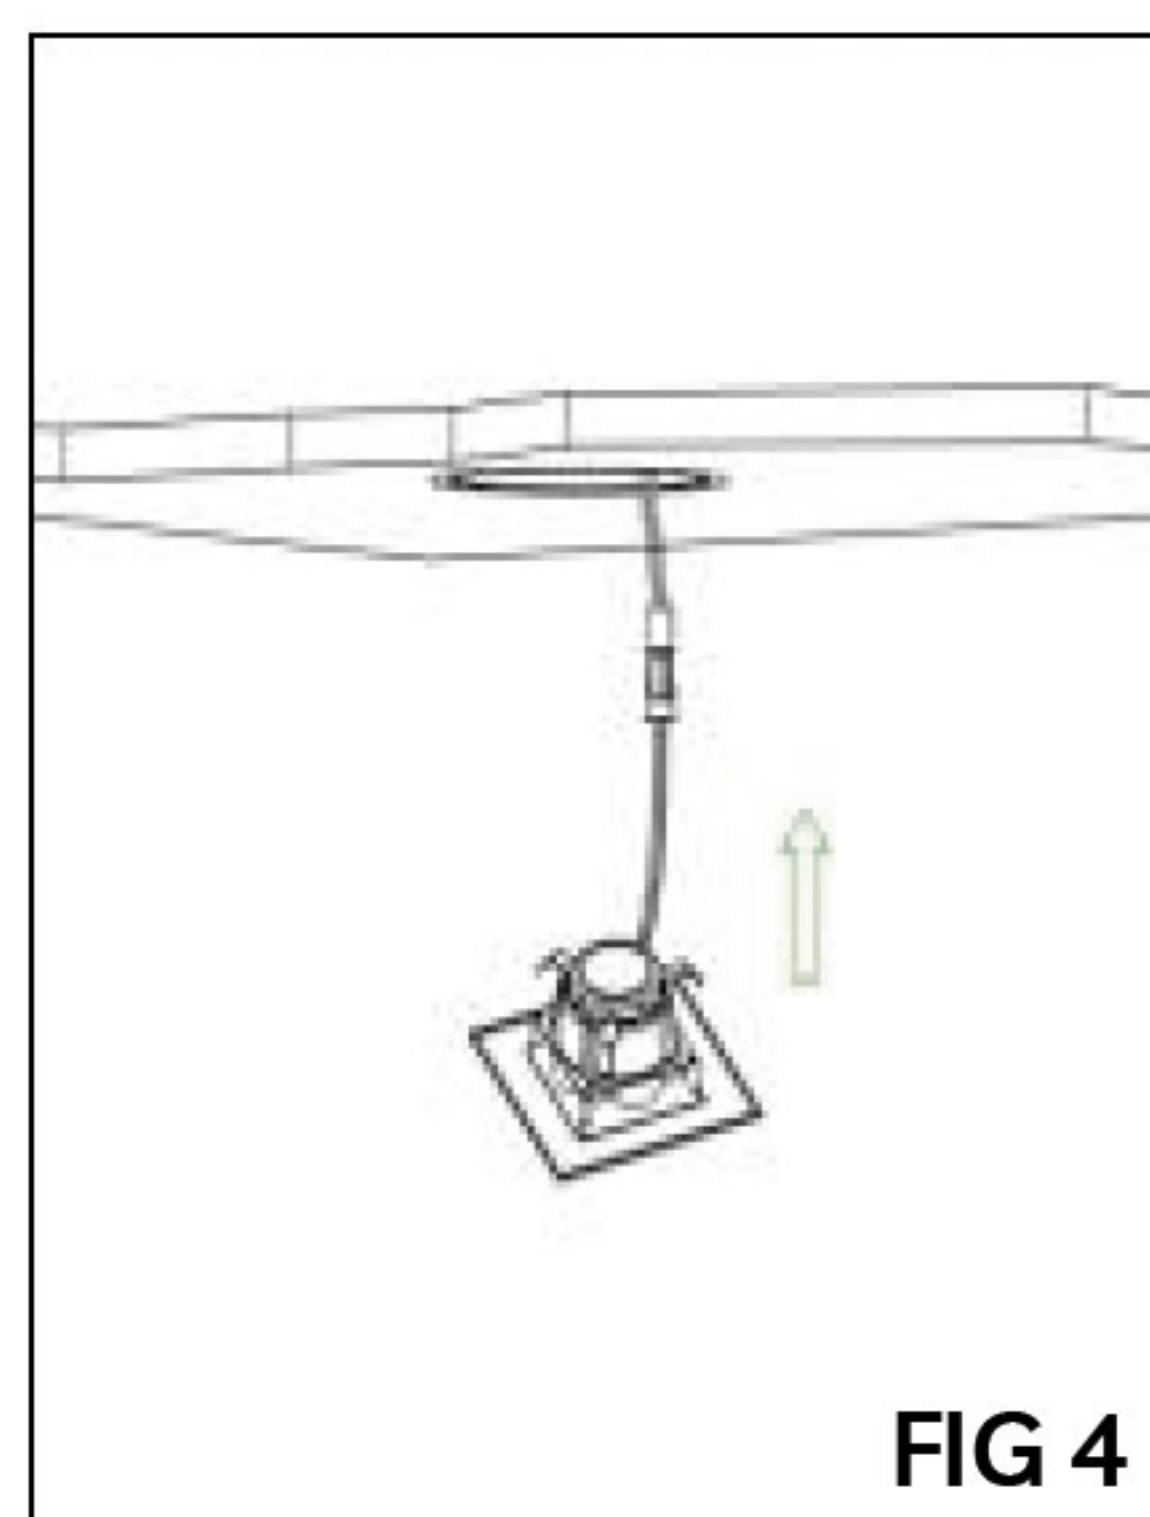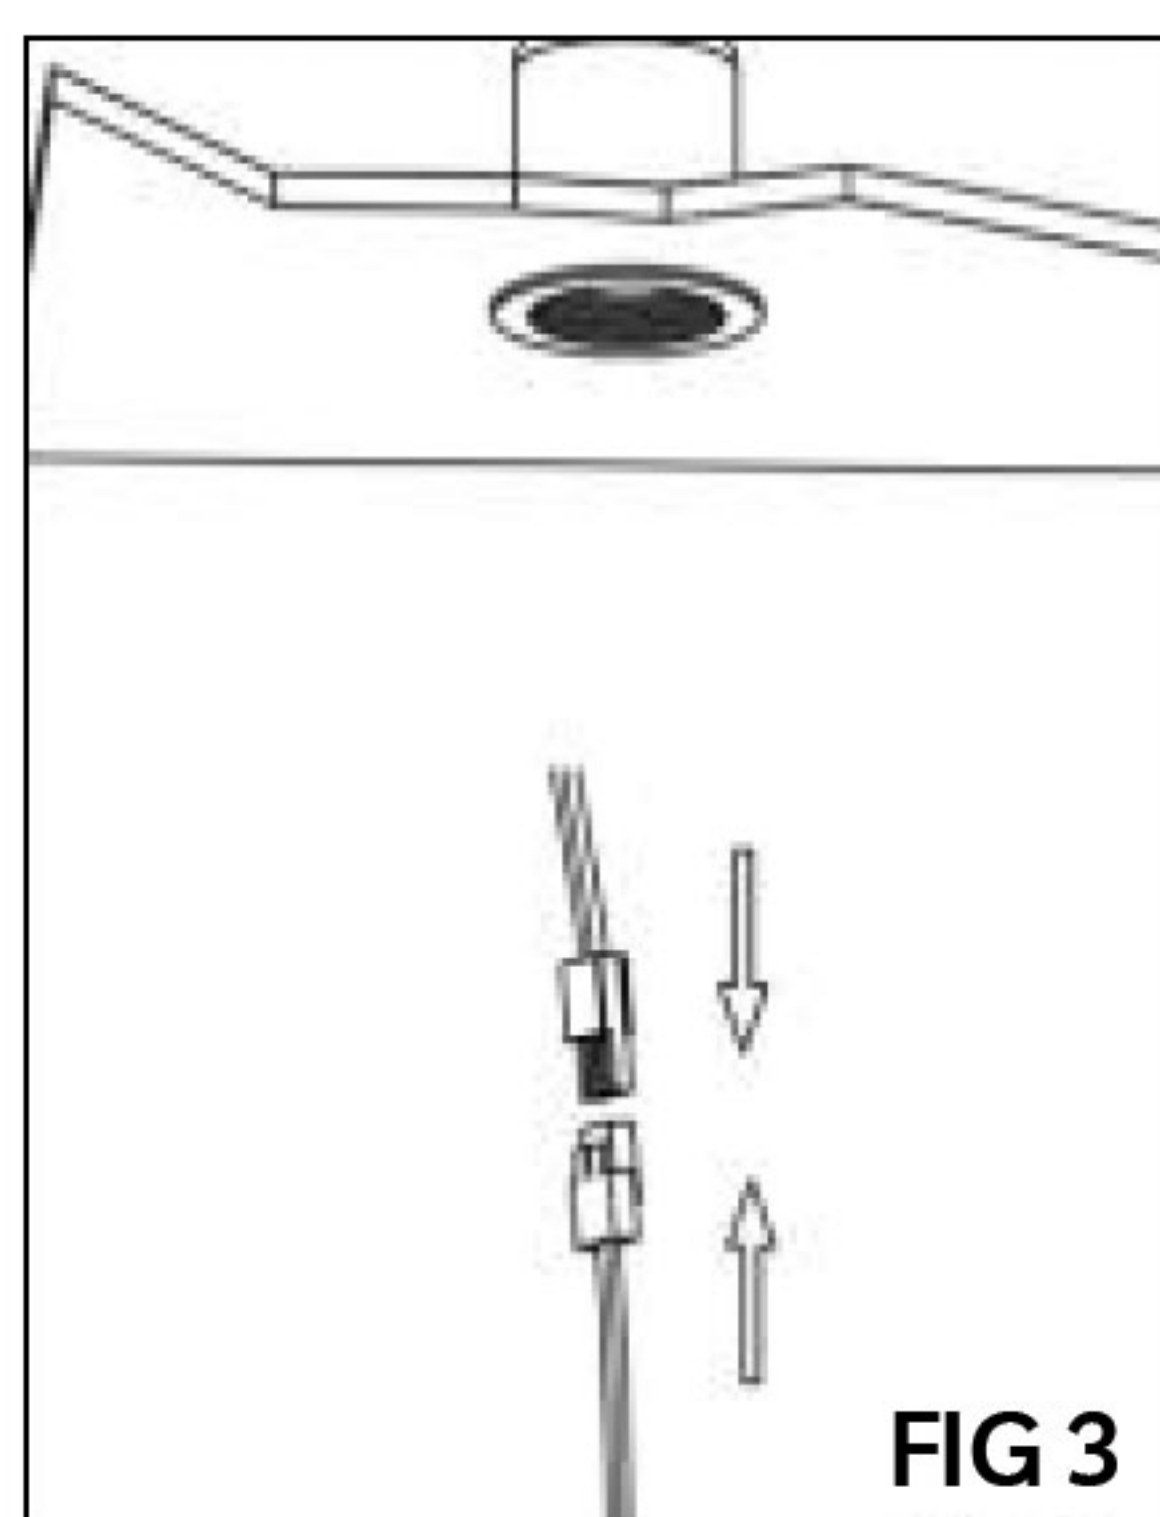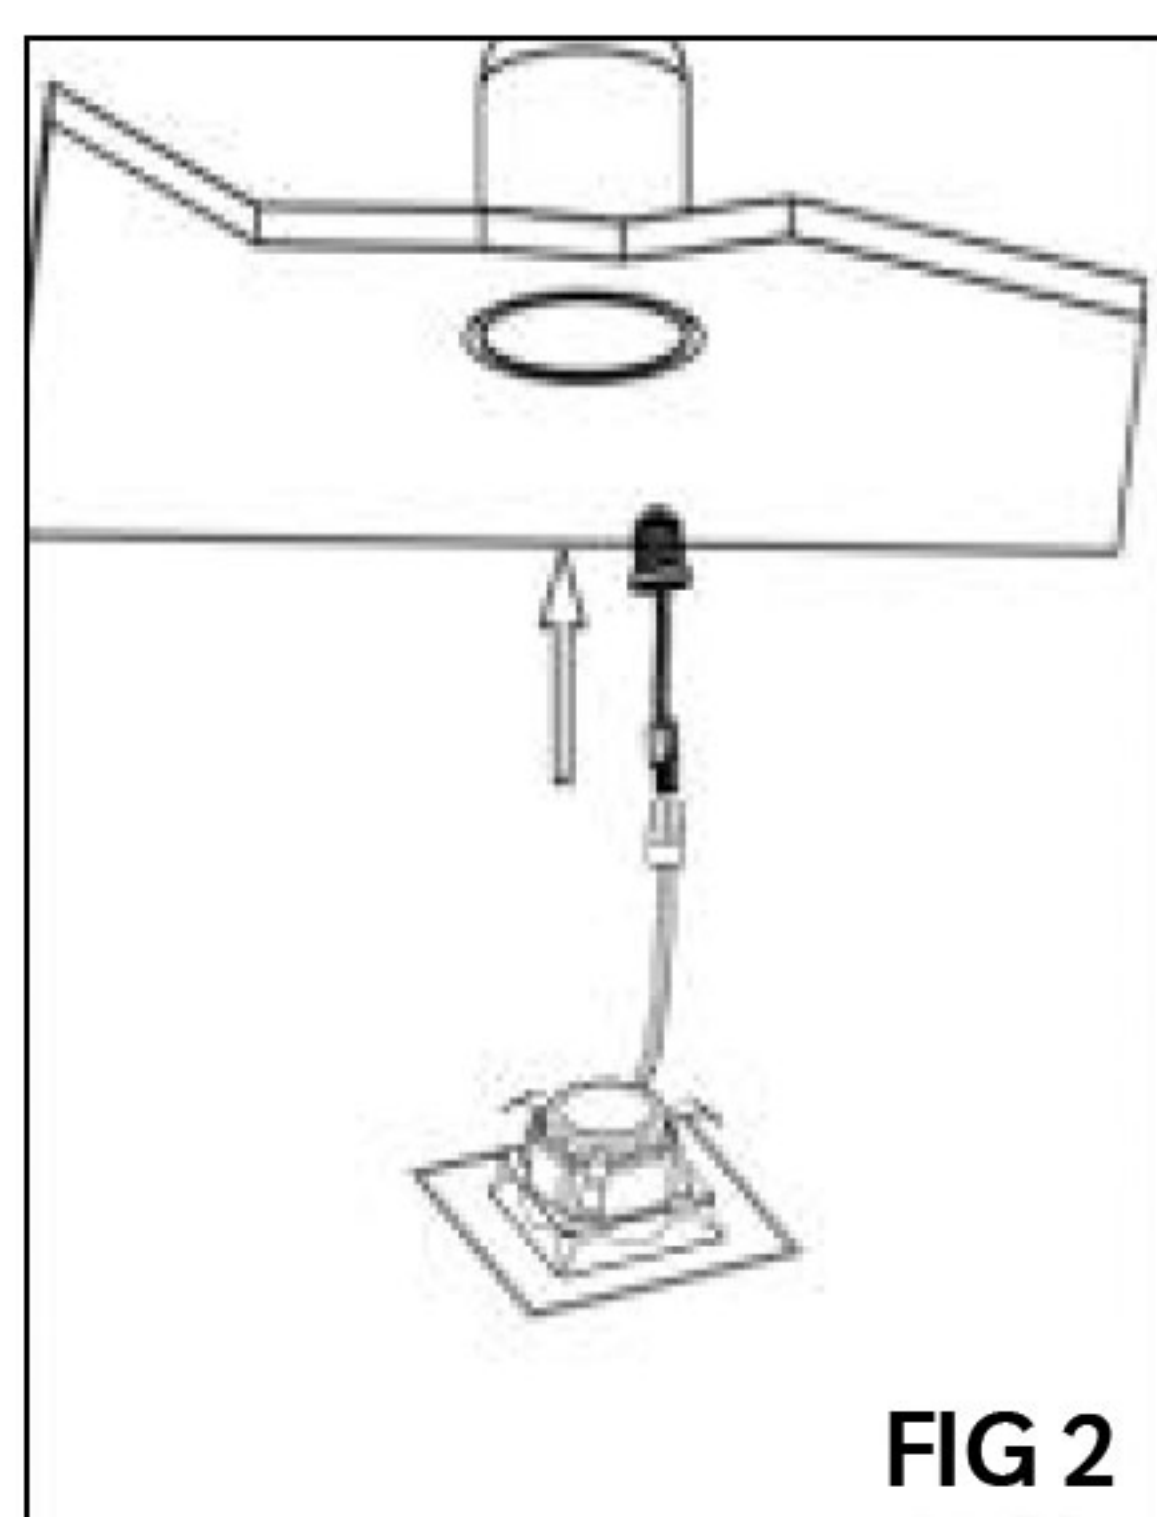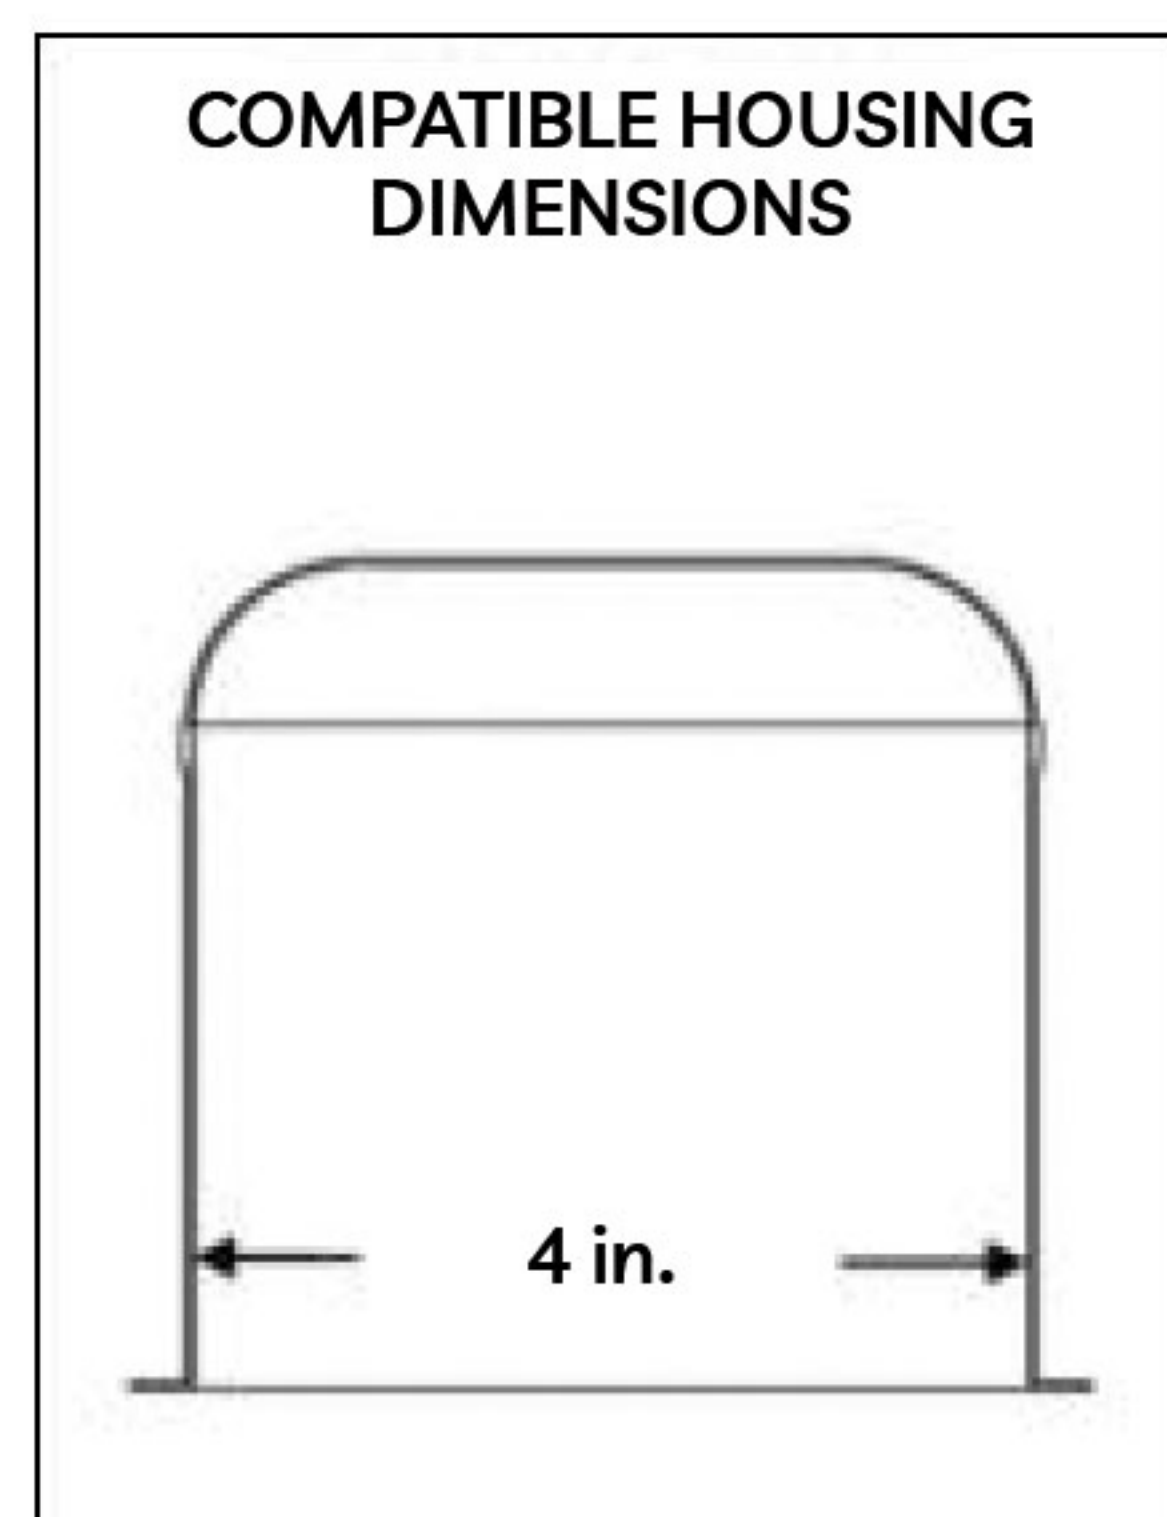

INCANDESCENT HOUSINGS

- Thread the SOCKET ADAPTER into the SOCKET. (FIG. 2)
- Plug the FEMALE CONNECTOR of the RETROFIT TRIM onto the MALE CONNECTOR of the SOCKET ADAPTER ASSEMBLY. (FIG. 3)
- Push the Housing Assembly with the top side of the Remodel Clips through the hole until tight. Continue to push the Housing Assembly until the fixture snaps into place with the trim tight against the ceiling (FIG4)

LED HOUSINGS

- Plug the FEMALE CONNECTOR of the RETROFIT TRIM onto the MALE CONNECTOR of the HALO HOUSING. (FIG. 3)
- Tuck all wires into the CAN and carefully push the RETROFIT TRIM into CAN.

(NOTE: To provide enough room in shallow cans, carefully position SOCKET ADAPTER and SOCKET adjacent to the long side of the LED DRIVER prior to inserting the RETROFIT TRIM into the CAN.) (FIG. 4)