Save The Environment
KRUT LED
Save Power
TM

Commercial &
Industrial Lighting

LED
SQUARE CANOPY LIGHTS

55W - 75W

LED SQUARE CANOPY LIGHTS

DESCRIPTION:

Perfact for lower ceiling canopy, church portico, office building portico, higher raised drive ways, parking garages. Easy to install.

APPLICATIONS:

Canopy Lighting, Underground car parking lots, Garage

SPECIFICATION FEATURES

LISTING:

UL Number : E473338

WARRANTY:

5 Yrs Warranty

SUITABLE FOR WET LOCATIONS:

IP65

ORDER INFORMATION

KL	SN	WATTAGE	CP	CCT	LYRA1
KL	SN	55W 75W	CP	40K: 4000K 45K: 4500K 50K: 5000K	

PRODUCT DIMENSION

75W

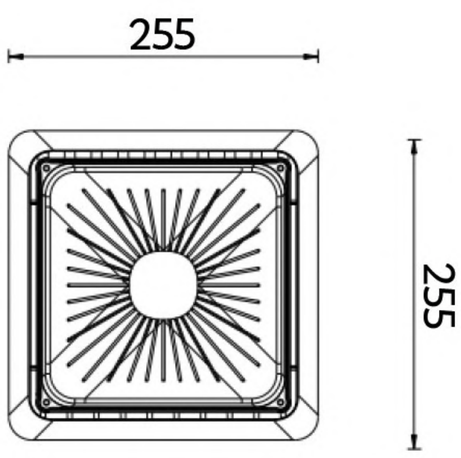

55W

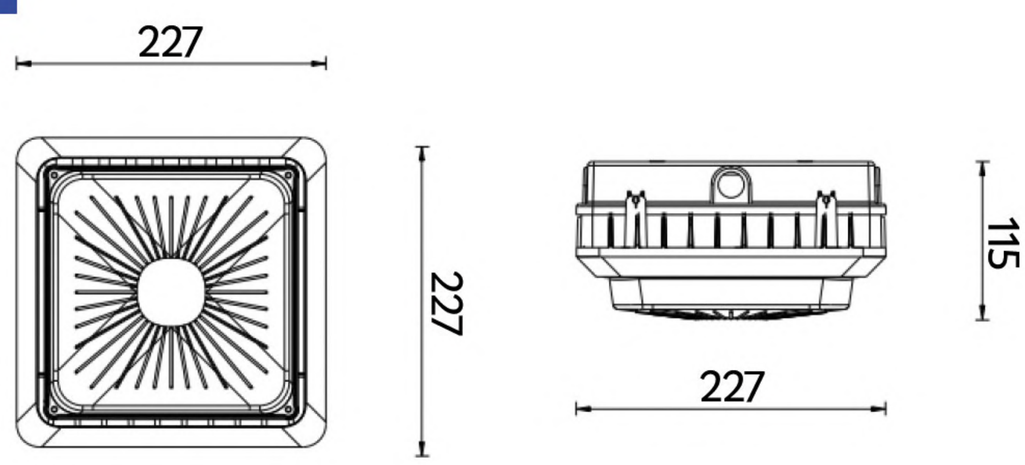

Notice for Users

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

Krut LED LLC - 111 Preamble Ct, Anderson, SC-29621 - Ph: 864-401-8156
Website: www.krutled.com - Email: sales@krutled.com

LED SQUARE CANOPY LIGHTS

LIGHTING PARAMETERS

Product Code	KLSN55CPXX-LYRA1	KLSN75CPXX-LYRA1
Wattage	55W	55W
Color Temperature	4000K/4500K/5000K	4000K/4500K/5000K
Application	Outdoor	Outdoor
CRI	>80	>80
Driver Model	China Brand Driver	China Brand Driver
Viewing Angle	160°	160°
Input Voltage	100-277Vac 50/60Hz	100-277Vac 50/60Hzt
LED Type	SMD2835 (0.5W)	SMD2835 (0.5W)
Lumen	6900-7450 LM	9400-10000 LM
Lumen Efficancy	127-133 LM/W	127-133 LM/W
Operating Humidity	20%-90% RH	20%-90% RH
Operating Temperature	-20°C To 45°C	-20°C To 45°C
PFC	0.9	0.9
Storage Temperature	-30°C To 80°C	-30°C To 80°C
Warranty	5 Years	5 Years
Water Proof Rating	IP65	IP65

PRODUCT FEATURES

- UL, DLC certificate;
- IP65 Internal driver,Input voltage 100-277Vac;
- No UV or IR in the beam;
- Easy to install and operate;
- Energy saving, long lifespan;
- Instant start, NO flickering, NO humming;
- Green and eco-friendly without mercury

PRODUCT PACKAGING

PRODUCT CODE	BOX	CARTON SIZE	G.W/CARTON	QUANTITY
KLSN55CPXX-LYRA1	Inner box	280x270x175 MM	2.4 KG	1 PCS
	Outer box	560x370x300 MM	10.6 KG	4 PCS
KLSN75CPXX-LYRA1	Inner box	305x300x185 MM	3.5 KG	1 PCS
	Outer box	390x315x325 MM	7.8 KG	2 PCS

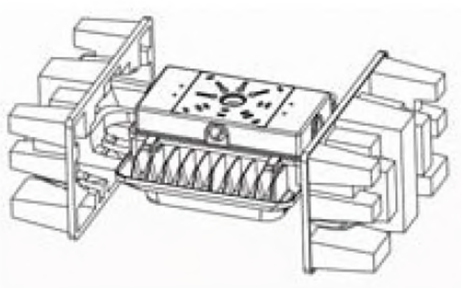

Krut LED LLC - 111 Preamble Ct, Anderson, SC-29621 - Ph: 864-401-8156
Website: www.krutled.com - Email: sales@krutled.com

LED SQUARE CANOPY LIGHTS

PHOTOMETRICS & LUX CHART

KLSN55CPXX-LYRA1

Lux Chart

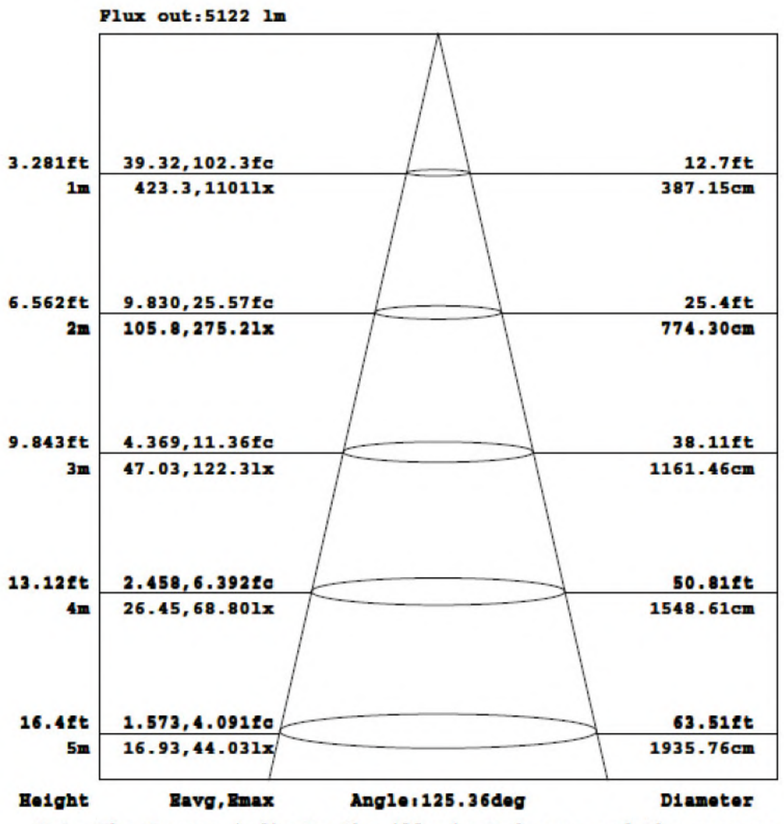

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Photometrics

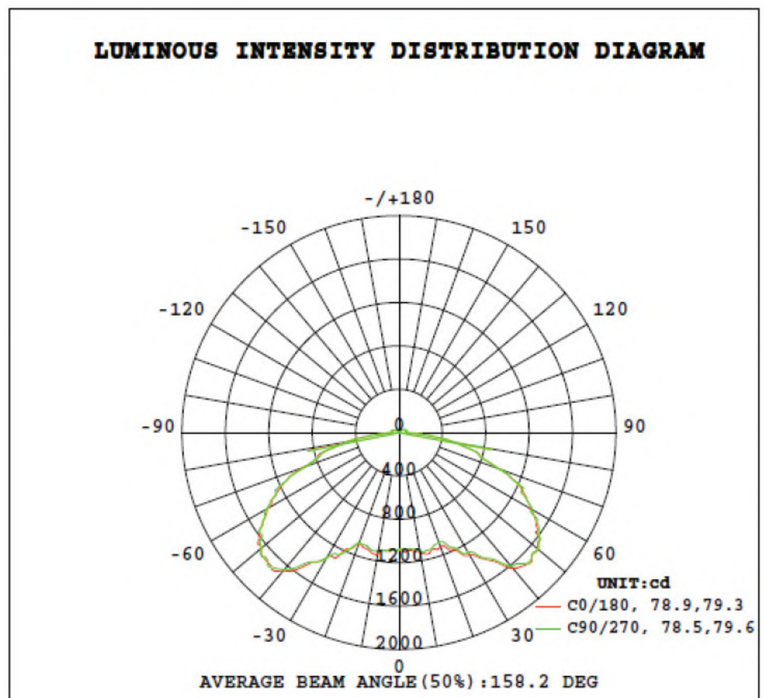

KLSN75CPXX-LYRA1

Lux Chart

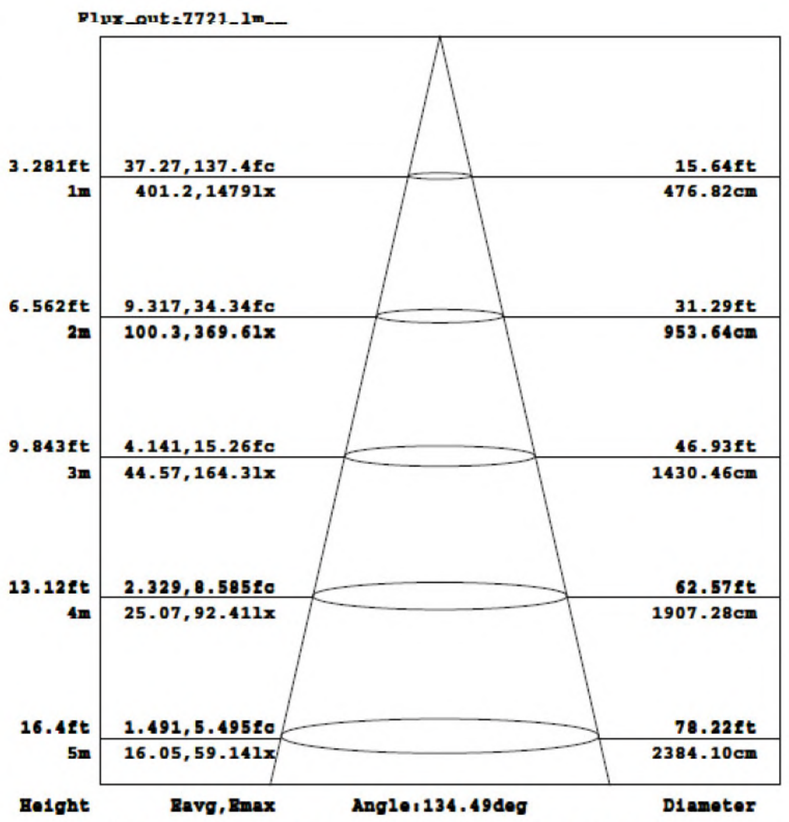

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Photometrics

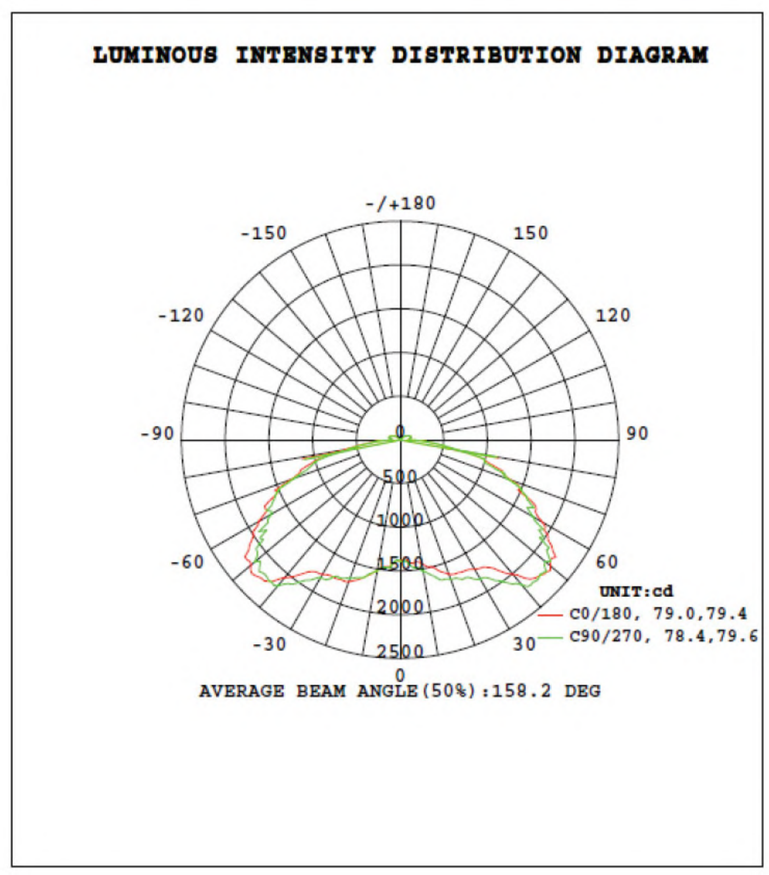

Krut LED LLC - 111 Preamble Ct, Anderson, SC-29621 - Ph: 864-401-8156
Website: www.krutled.com - Email: sales@krutled.com