

**ADORE LED****9 W / 11 W / 15 W**

Experience exceptional illumination with our high-performance LED Lamps. Designed for efficiency and reliability, our lights deliver bright, consistent lighting for any space. Enjoy enhanced clarity and energy-saving benefits, transforming your environment with a simple flick of a switch. With our LED Lamps, you'll experience brilliant illumination that not only enhances visibility but also reduces energy consumption. Trust in our reliable and efficient lighting solution to create a well-lit and inviting space for your needs.

**9 W****11 W****15 W**

APPLICATIONS

- Educational Institution
- Healthcare Facilities
- Residential Areas
- Industrial Spaces
- Office Space
- Retail Stores

FEATURES

- Energy-efficient lighting solution for reduced electricity consumption.
- Durable construction for reliable performance and low maintenance.
- Environmentally friendly with no harmful substances like mercury.
- High color rendering index (CRI) for accurate and vibrant lighting.
- Instant and flicker-free illumination for immediate brightness.
- Easy installation and compatibility with standard E26 Holders.
- Long lifespan for extended usage and cost savings.
- Wide beam angle for uniform lighting distribution.



CONFORMS TO UL Std. 1993
Cert. to CSA Std. C22.2 No. 1993

**WARRANTY****CRI****RATED LIFE****MADE IN INDIA**

CAUTION SUITABLE FOR DAMP LOCATIONS
NOT FOR USE IN TOTALLY ENCLOSED LUMINAIRES
ATTENTION ADAPTÉ AUX ENDROITS HUMIDES
NE PAS UTILISER DANS DES LUMINAIRES
TOTALEMENT FERMÉS

NOT FOR EMERGENCY LIGHTING / PAS POUR
L'ÉCLAIRAGE D'URGENCE



ADORE LED

9 W / 11 W / 15 W

TECHNICAL SPECIFICATION

Lamp Description	SAP Code	Model No.	Input Voltage Range	Rated Life (Hours)	Input Frequency	Power Factor
ADORE LED LAMP DIM A19-9W 3K E26	LOLDDHBN5R9	A19-9W3K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-9W 4K E26	LOLDDHBNH5R9	A19-9W4K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-9W 5K E26	LOLDDHBNJ5R9	A19-9W5K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-11W 3K E26	LOLDDHBN5R11	A19-11W3K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-11W 4K E26	LOLDDHBNH5R11	A19-11W4K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-11W 5K E26	LOLDDHBNJ5R11	A19-11W5K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-15W 3K E26	LOLDDHBN5R15	A19-15W3K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-15W 4K E26	LOLDDHBNH5R15	A19-15W4K	120 V AC	12000	60 Hz	>0.7
ADORE LED LAMP DIM A19-15W 5K E26	LOLDDHBNJ5R15	A19-15W5K	120 V AC	12000	60 Hz	>0.7

OPTICAL PARAMETERS

Lamp Description	SAP Code	Total Lumens (lm)	Lumen Efficacy (lm/W)	Product CCT	CCT Range	Product CRI
ADORE LED LAMP DIM A19-9W 3K E26	LOLDDHBN5R9	800 lm	89 lm/W	3000 K	3045±175	80
ADORE LED LAMP DIM A19-9W 4K E26	LOLDDHBNH5R9	800 lm	89 lm/W	4000 K	3985±275	80
ADORE LED LAMP DIM A19-9W 5K E26	LOLDDHBNJ5R9	800 lm	89 lm/W	5000 K	5028±283	80
ADORE LED LAMP DIM A19-11W 3K E26	LOLDDHBN5R11	1100 lm	100 lm/W	3000 K	3045±175	80
ADORE LED LAMP DIM A19-11W 4K E26	LOLDDHBNH5R11	1100 lm	100 lm/W	4000 K	3985±275	80
ADORE LED LAMP DIM A19-11W 5K E26	LOLDDHBNJ5R11	1100 lm	100 lm/W	5000 K	5028±283	80
ADORE LED LAMP DIM A19-15W 3K E26	LOLDDHBN5R15	1500 lm	100 lm/W	3000 K	3045±175	80
ADORE LED LAMP DIM A19-15W 4K E26	LOLDDHBNH5R15	1500 lm	100 lm/W	4000 K	3985±275	80
ADORE LED LAMP DIM A19-15W 5K E26	LOLDDHBNJ5R15	1500 lm	100 lm/W	5000 K	5028±283	80

MECHANICAL PARAMETERS

Lamp Description	SAP Code	Product Dimension (mm)	Ingress Protection	Housing Type	Housing Weight (lbs)	Product Net Weight (lbs)
ADORE LED LAMP DIM A19-9W 3K E26	LOLDDHBN5R9	Ø59×105	IP 20	Housing (Aluminium insert PA) + Diffuser (PC)	0.02	0.05
ADORE LED LAMP DIM A19-9W 4K E26	LOLDDHBNH5R9	Ø59×105	IP 20		0.02	0.05
ADORE LED LAMP DIM A19-9W 5K E26	LOLDDHBNJ5R9	Ø59×105	IP 20		0.02	0.05
ADORE LED LAMP DIM A19-11W 3K E26	LOLDDHBN5R11	Ø60×110	IP 20		0.03	0.07
ADORE LED LAMP DIM A19-11W 4K E26	LOLDDHBNH5R11	Ø60×110	IP 20		0.03	0.07
ADORE LED LAMP DIM A19-11W 5K E26	LOLDDHBNJ5R11	Ø60×110	IP 20		0.03	0.07
ADORE LED LAMP DIM A19-15W 3K E26	LOLDDHBN5R15	Ø65×124	IP 20		0.04	0.09
ADORE LED LAMP DIM A19-15W 4K E26	LOLDDHBNH5R15	Ø65×124	IP 20		0.04	0.09
ADORE LED LAMP DIM A19-15W 5K E26	LOLDDHBNJ5R15	Ø65×124	IP 20		0.04	0.09




ADORE LED

9 W / 11 W / 15 W

SHIPPING

Lamp Description	Product Dimension (in)	Master Carton Quantity	Master Carton Dimension (in)	Master Carton Weight (lbs)	40' HQ Container (Case)	Per Pallet (Case)
ADORE LED LAMP DIM A19-9W 3K E26	Ø2.32×4.13	60 Pcs.	14.72×12.36×8.97	6.3	138000	4860
ADORE LED LAMP DIM A19-9W 4K E26	Ø2.32×4.13	60 Pcs.	14.72×12.36×8.97	6.3	138000	4860
ADORE LED LAMP DIM A19-9W 5K E26	Ø2.32×4.13	60 Pcs.	14.72×12.36×8.97	6.3	138000	4860
ADORE LED LAMP DIM A19-11W 3K E26	Ø2.36×4.33	60 Pcs.	14.72×12.36×9.45	7.25	132000	4320
ADORE LED LAMP DIM A19-11W 4K E26	Ø2.36×4.33	60 Pcs.	14.72×12.36×9.45	7.25	132000	4320
ADORE LED LAMP DIM A19-11W 5K E26	Ø2.36×4.33	60 Pcs.	14.72×12.36×9.45	7.25	132000	4320
ADORE LED LAMP DIM A19-15W 3K E26	Ø2.56×4.88	60 Pcs.	15.67×13.11×10.55	8.82	100020	2520
ADORE LED LAMP DIM A19-15W 4K E26	Ø2.56×4.88	60 Pcs.	15.67×13.11×10.55	8.82	100020	2520
ADORE LED LAMP DIM A19-15W 5K E26	Ø2.56×4.88	60 Pcs.	15.67×13.11×10.55	8.82	100020	2520

DIMENSIONS

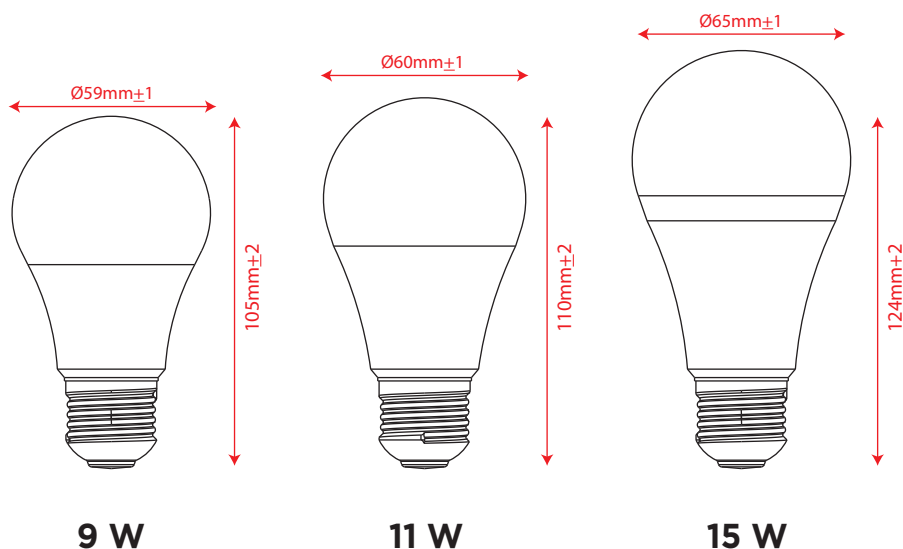



ADORE LED

9 W / 11 W / 15 W

WARNING

- To prevent injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.
- Risk of fire or electric shock. The electrical rating of these products are 120 V AC $\pm$ 10%, the installer must determine whether they have 120 V AC $\pm$ 10% at the luminaire before installation.
- Risk of fire or electric shock. Installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Disconnect power before installing the product or servicing it.
- Wait until fixture has cooled down before installing or servicing the fixture.
- Warranty Period assumes that the Products are operated for less than 8 hours per day.

Havells India Ltd.

Corp. Office : QRG Towers, 2D, Sector-126,
Expressway, Noida - 201 304. U.P. (INDIA)
Website : www.havells.com

Imported and Distributed by :

KZ Cart INC. 
111, PREAMBLE CT, ANDERSON, SC 29621, USA
Email - contact@nothingfromchina.com
Website - www.nothingfromchina.com
Tel : 864-401-8156