


INSTALLATION GUIDE

LED Canopy Light

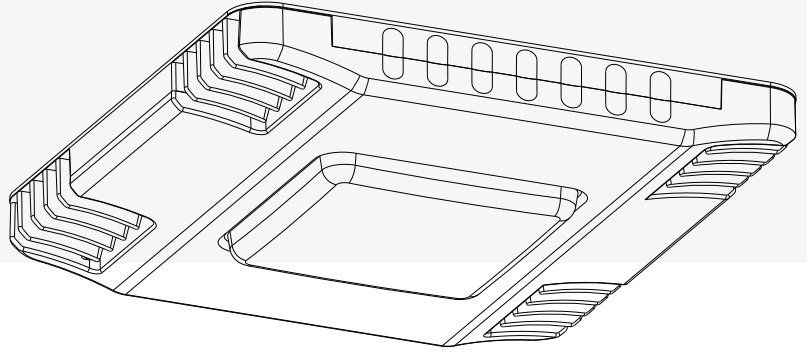

CAUTIONS:

1. Do not use the electric generator to test the LED lamp.
2. Install this fixtures in accordance with the relevant country, regional and local regulations.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.

NOTICE:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.

ATTENTION:

1. Please check if there is any damage during shipping. If so, please contact the manufacturer immediately.
2. Please read the installation instructions carefully to check whether all the accessories are complete. After confirmation, install the fixture according to installation steps.
3. The installation of the product can be used when it is marked with "✓".

*Pictures and diagrams in this IM are for illustrative purpose only.

INSTALLATION METHOD I:

1. Fix one side of the accessory safety rope on the back of the fixture (Figure 1).
2. Use electric drill to set fixed holes through the ceiling (Figure 2).
3. Fix another side of safety rope on the ceiling, then connect the wire of fixture to main supply according to local electrical connection mode, make sure good protection on the wire joint, after that, fix the fixture on the ceiling with accessory screws (Figure 3).




Figure 1




Figure 2




Figure 3

INSTALLATION METHOD II:

1. Connect the wiring to the local power supply in the 3/4" NPT Stem (Figure 4).
2. Screw the fixture to the 3/4" NPT Stem (Figure 5).




Figure 4




Figure 5

INSTALLATION METHOD III:

1. Fix the mounting bracket on the back of fixture by supplied screws. (Figure 6).
2. Unscrew the nut from customer supplied 3/4" NPT stem, make the stem hole on mounting bracket through 3/4" NPT stem, then screw the nut back to 3/4" NPT, and fix it. (Figure 7).
3. Make wiring connections per "Electrical Connections" section and make sure the good wire protection.




Figure 6




Figure 7

1. Drill the alignment holes on the top ceiling, make them match to the holes on mounting bracket. (Figure 8).
2. Insert the supplied rubbers into the alignment holes, then fix the mounting plate on the ceiling by supplied screws. (Figure 9).
3. Mount the fixture on the mounting plate by supplied screws. (Figure 10).
4. Make wiring connections per "Electrical Connections" section and make sure the good wire protection.




Figure8




Figure9


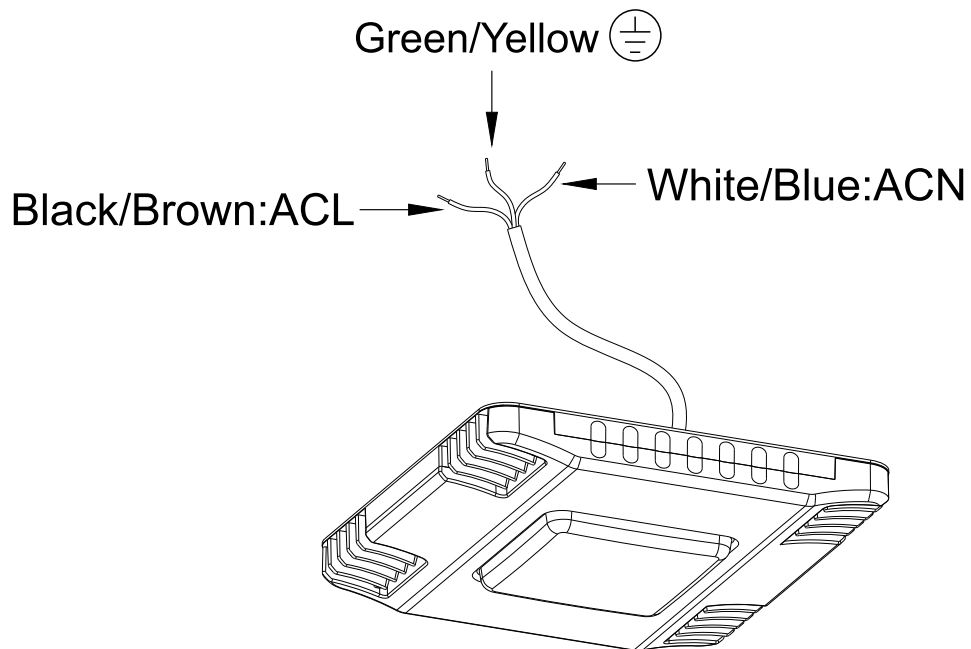


Figure10

*Pictures and diagrams in this IM are for illustrative purpose only.

WARNING / AVERTISSEMENT**MIN 75°C SUPPLY CONDUCTOR****THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

*Pictures and diagrams in this IM are for illustrative purpose only.